

Electromechanical and solid-state Zelio[®] Relays

Catalog
2010





Reduce the size of your enclosures and, at the same time, increase machine reliability...



with these new Zelio® Relays

> Electromechanical relays RSL

Only 6 mm wide, thus saving considerable space in your enclosures



6 mm wide

> Solid-state relays SSR

Enhanced service life provided by electronic technology



Enhanced service life

Contents

Introduction

Save Space with Zelio Relay RSL	4-5
Choose long life and silent operation with Zelio Relay SSR	6-7
Electromechanical and solid-state relays panorama	8-9

Technical characteristics

Zelio Relay RSL	12-17
Zelio Relay RSB, RXM, RUM, RPM	18-49
Zelio Relay ABR, ABS	54-73
Zelio Relay SSR	74-81

Make the most of your energySM



Save space with Zelio[®] Relay RSL

Only 6 mm wide

reduces the size of your enclosure


> A solution for any application

A versatile offer

- > An offer with maximum flexibility, comprising:
 - complete products: a single reference for a relay mounted on a socket,
- > Wide choice of sockets available covering a range of voltages from 12 to 230 V.
 - select the relay and associated socket according to your application.

An offer that meets the most demanding standards

- Conformity with the European RoHS (Restriction of Hazardous Substances) directive.
- Conformity to international standards IEC/EN 61810-1, UL508, CSA C22.2 N°14, GOST.

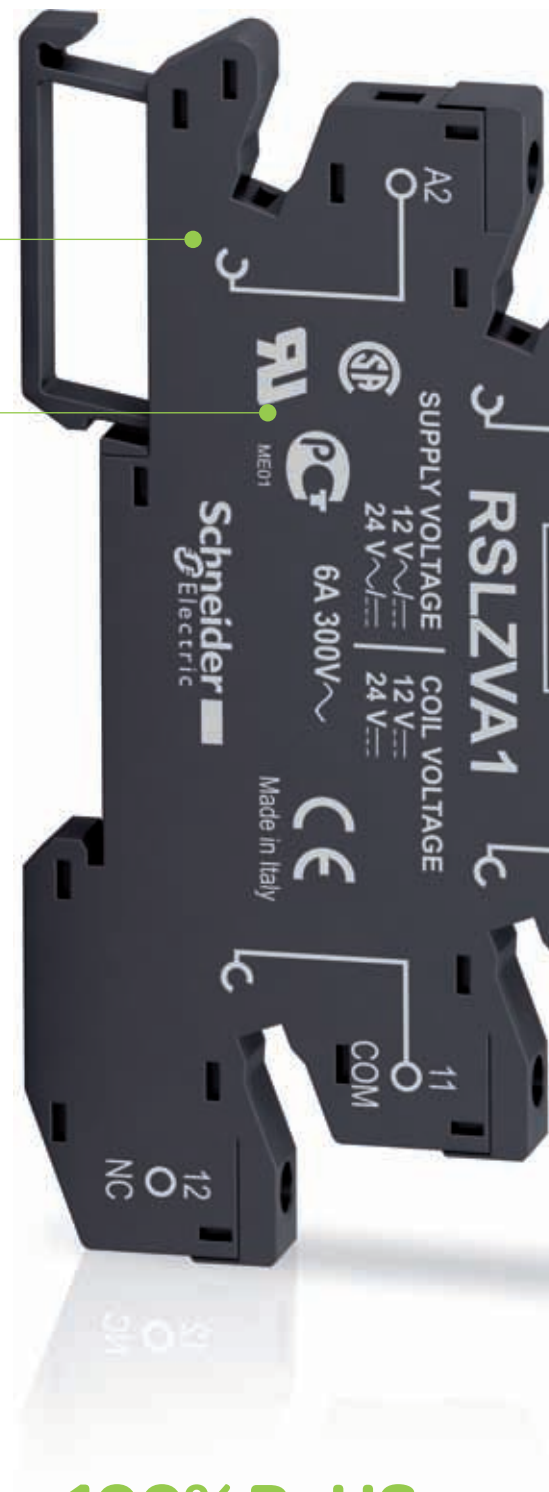

100% RoHS

Schneider Electric commits itself to reducing the environmental impact of its products

> Increased reliability in operation

Added protection in the socket

Built-in protection from transients and reverse polarity voltages.

LED indicator

Power on and relay status indication.



Standard 1 C/O relays

For general purpose load requirements.

Up to **6A**
switching

> Simple installation and maintenance

Simple maintenance of relay in socket
Using locking/unlocking lever.

Simple wiring

Bus jumpers available as accessories.

Simple mounting on DIN rail

2 connection choices


Suitable for the majority of your applications.



Screw connector



Spring terminal

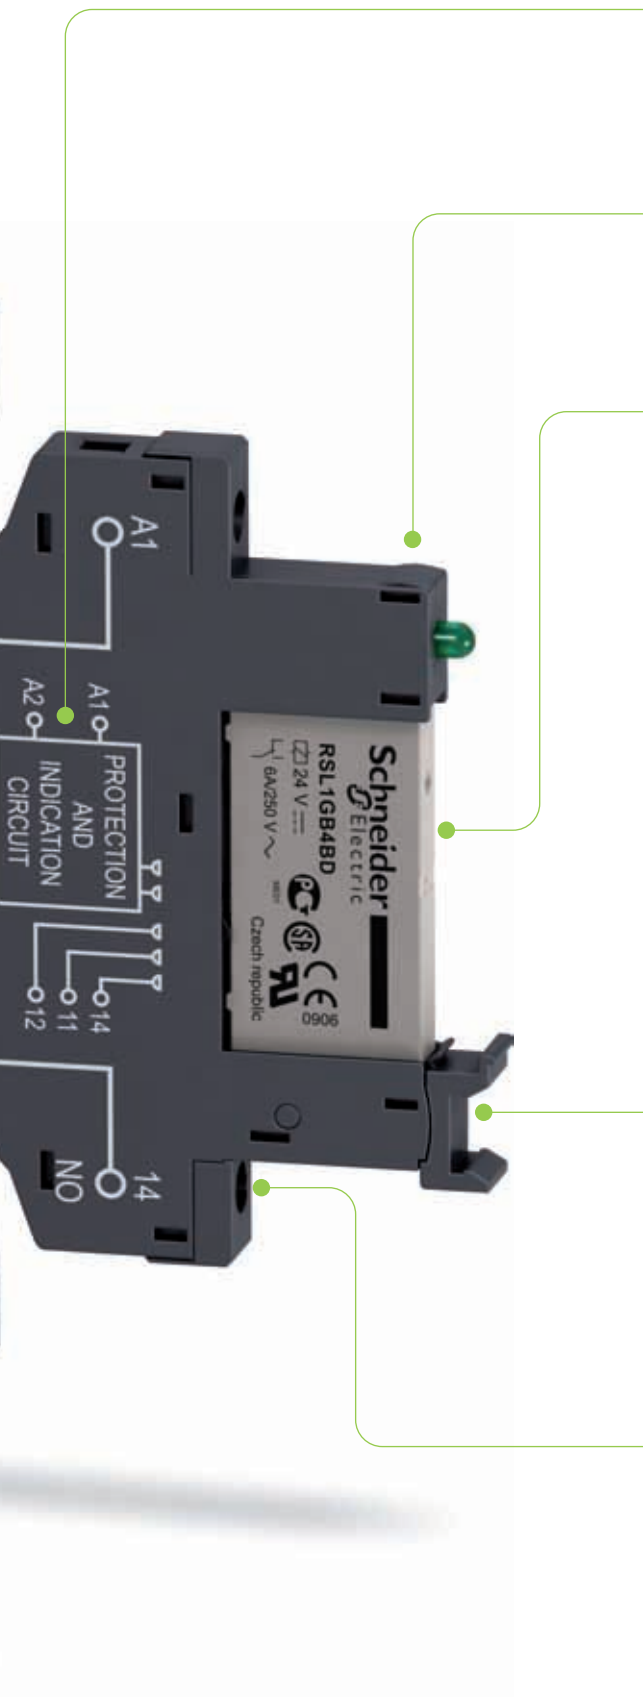

Choose long life and silent operation with Zelio® SSR Relays

> Optimized heat exchange


The new solid-state relays SSR with SCR (Semiconductor Controlled Rectifier) outputs offer you two alternatives:

SSRD range

Integrated heat sink to provide factory tested heat exchange, that easily mounts by clipping directly onto DIN rail. Can also be panel mounted.

SSRP range

Panel mounted, either by itself or combined with a heat sink for applications requiring considerable heat exchange.

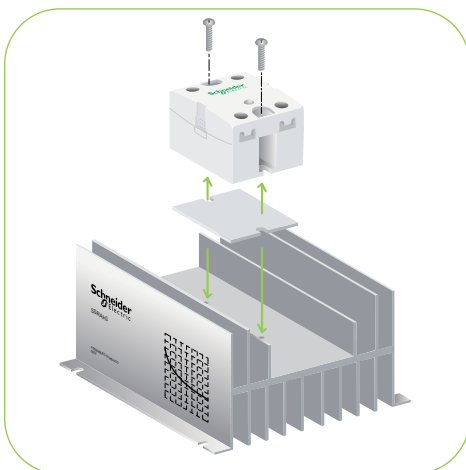

SSRP relay mounted on heat sink with thermal transfer pad



> Distinctive indication

A green LED on the front face of the products provides instant indication of the presence of input voltage.



> High performance

High breaking capacities

- From 10 to 125 A for relays SSRP
- From 10 to 45 A for relays SSRD

Wide supply voltage range

- From 3 to 32 VDC and 90 to 280 VAC

Outputs suited to applications

- From 24 to 280 VAC and 48 to 530/660 VAC

Space Saving SSRD series

- Only 22.5 mm and up to 45.5 mm wide

Enhanced service life

- Reduced preventive maintenance. SSR relays have little to no maintenance required once applied correctly.

Silence of electronic technology

- Complete silence when switching

Vibration resistant

- Even in the event of excessive vibration, the relay will not change state

Enhanced service life

due to electronic relay technology

Complete silence when switching

providing suitability for building and hospital applications

High switching frequency

particularly on packaging and textile machines

> Conformity to international standards

**100%
RoHS**

Schneider Electric commits itself to reducing the environmental impact of its products

Panorama Zelio® Relays

Electromechanical relays



Contact configuration	1 C/O	1 or 2 C/O	1 or 2 C/O	2, 3 or 4 C/O
Current	6 A	8-12-16 A	5-12 A	6-10-12 A
Mounting	DIN rail		DIN rail	DIN rail or panel
Catalog numbers	RSL	RSB	ABR	RXM
Pages	12 to 17	20 to 23	54 to 73	24 to 31

Electromechanical relay advantages

- Wide number of contacts (up to 4)
- Easy installation and maintenance
- Socket compatible plug in relays
- Flag indicator to show contact status
- Lockable test button for checking circuit during build
- Magnetically isolated
- Coil voltage LED indicator

Electromechanical relays

Solid-state relays



2, 3 or 4 C/O	1, 2, 3 or 4 C/O	2 C/O or 2 N/O	1 N/O	1 N/O	1 N/O
10 A	15 A	30 A	3 A	10 ...45 A	10 ...125 A
DIN rail or panel			DIN rail	DIN rail or panel	Panel
RUM	RPM	RPF	ABS	SSRD	SSRP
32 to 41	42 to 49	50 to 53	54 to 73	74 to 81	74 to 81

Solid-state relay (SSR) advantages

- Enhanced service life
- Wide supply voltage range and high breaking current (up to 125 A), suited to packaging and textile machines
- Input power indicator
- Completely silent switching, suitable for building and hospital applications
- Vibration resistant

Relays

Contact types

Circuit symbol	Contact configuration	EU nomenclature	USA nomenclature
	Make contact (Normally Open)	N/O	SPST-NO DPST-NO nPST-NO (1)
	Break contact (Normally Closed)	N/C	SPST-NC DPST-NC nPST-NC (1)
	Changeover Contact	C/O	SPDT DPDT nPDT (1)

Utilization categories

Category	Type of current	Applications
AC-1	~ single-phase ~ 3-phase	Resistive or slightly inductive loads.
AC-3	~ 3-phase	Starting and braking of squirrel cage motors; reversing direction of rotation only after stopping of motor.
AC-4	~ 3-phase	Starting of squirrel cage motors, inching. Plugging, reversing direction of rotation.
DC-1	---	Resistive or slightly inductive loads (2).
AC-14	~ single-phase	Control of electromagnetic loads (< 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
AC-15	~ single-phase	Control of electromagnetic loads (> 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
DC-13	---	Control of electromagnetic loads, auxiliary control relays, power contactors, magnetic solenoid valves and electromagnets.

Protection categories

Category	Explanation	Condition
RT 0	Unenclosed relay	Relay not provided with a protective case.
RT I	Dust protected relay	Relay provided with a case which protects its mechanism from dust.
RT II	Flux-proof relay	Relay capable of being automatically soldered without allowing the migration of solder fluxes beyond the intended areas.
RT III	Wash-tight relay	Relay capable of being automatically soldered and then washed to remove flux residues without risk of ingress of flux or washing solvents.
RT IV	Sealed relay	Relay provided with a case which has no venting to the outside atmosphere.
RT V	Hermetically sealed relay	Sealed relay having an enhanced level of sealing.

(1) n = number of contacts.

(2) The switchable voltage can be doubled, for an equal current, by connecting two contacts in series.

Protection modules

Whenever an inductive load is de-energized (coil of a relay or of a contactor), an overvoltage appears at its terminals. This voltage peak can reach several thousand volts and a frequency of several MHz.

It is likely to disturb the operation of automation systems which contain electronic devices.

Protection modules are used to reduce the voltage peak on de-energization and they therefore limit the energy of interference signals to a level that will not disturb surrounding coils and electronic devices.

These modules are used to avoid:

- ☐ electromagnetic compatibility problems
- ☐ the deterioration of contact materials
- ☐ the destruction of insulation due to overvoltage
- ☐ the destruction of electronic components

Diode protection module (with or without LED)

■ Advantages

- ☐ accumulation of energy allowing current flow in the same direction
- ☐ absence of any voltage peaks at the coil terminals
- ☐ low cost

■ Considerations

- ☐ increase in relay drop-out time (up to 3 to 4 times the usual time)
- ☐ no polarity protection
- ☐ de-energization of the relay

Protection module with varistor

■ Advantages

- ☐ can be used with $\sim$ and --- supply
- ☐ voltage peak limited to about $2 U_n$
- ☐ little effect on relay drop-out time

■ Considerations

- ☐ no modification of coil's own oscillating frequency
- ☐ limitation of switching frequency


Protection module with RC circuit

■ Advantages


- ☐ coil oscillating frequency reduced to about 150 Hz
- ☐ voltage peak limited to $3 U_n$
- ☐ little effect on relay drop-out time

■ Considerations


- ☐ no protection for low voltages

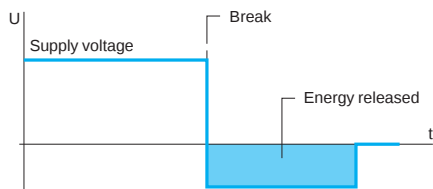

Coil voltage with diode protection module (--- only)

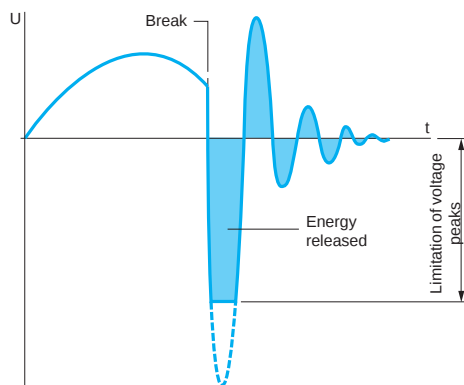

Coil voltage with varistor protection module ($\sim$ and ---)

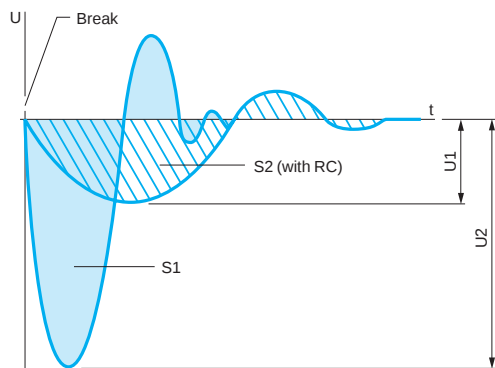

Coil voltage with RC circuit protection module ($\sim$ only)

S1 = S2 = Energy released

Introduction

RSL slim interface relays offers compact size in a modular design: their slim width (6 mm) saves valuable space when mounting on a DIN rail at the back of an enclosure.

RSL relays are available in two versions:

■ **Pre-assembled range:** a single catalog number for a standard relay mounted on a socket.

- The socket includes a built-in protection circuit (against transients and reverse polarity voltages) and an LED indicator as standard.
- Wire connection options: screw connectors and spring terminals.
- This pre-assembled solution covers a wide range of operating voltages from 12 to 230 V.


■ **Individual relays and sockets:**

- The relay and the socket can be provided separately according to the requirements of the application.
- Simple maintenance: an **RSL** slim relay can be replaced without any need to disconnect the socket wiring.

Description

RSL slim interface relays, pre-assembled

- 1 6 A standard relay with 1 C/O contact.
- 2 Retention lever for easy removal of the relay from its socket.
- 3 Sockets: wire connection by screw connector or spring terminals.
- 4 All sockets have a built-in protection circuit and an LED indicator.

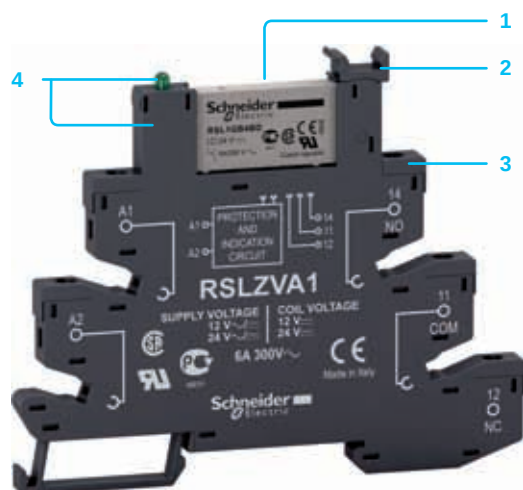


RSL slim interface relay

- 1 Five flat, reinforced PCB pins.

Sockets for RSL slim interface relays


- 1 Five female contacts for the relay pins.
- 2 Retention lever which accepts optional ID tags.
- 3 Wire connection by screw connector or spring terminals.
- 4 Built-in protection circuit and LED indicator.
- 5 Locating slot for mounting on DIN rail.

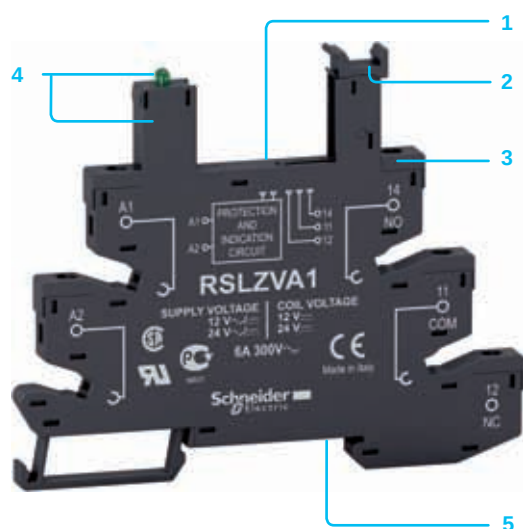



General characteristics			
Conforming to standards			IEC 61810-1, UL 508, CSA C22-2 No. 14
Product certifications			UL E173076, UL E172326, CSA 240278, CSA 247510, GOST
Ambient air temperature around the device	Storage	°C	- 40... + 85
	Operation	°C	- 40... + 55
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		10 gn
	Not operating		5 gn
Degree of protection	Conforming to IEC/EN 60529		IP 40 (Relays) IP 20 (Sockets)
Shock resistance conforming to IEC/EN 60068-2-27	Opening		10 gn
	Closing		5 gn
Protection category			RT III
Mounting position			Any
Insulation characteristics			
Rated insulation voltage (Ui)		V	250 (IEC)
Rated impulse withstand voltage (Uimp)		kV	6
Dielectric strength (rms voltage)	Between coil and contact	~ V	4000
	Between contacts	~ V	1000

Contact characteristics				
Relay type			RSL1AB●●●	
Number and type of contacts			1 C/O standard	
Contact materials			AgSnO2	
Conventional thermal current (I _{th})	For ambient temperature ≤ 55 °C	A	6	
	Rated operational current in utilization categories AC-1 and DC-1	N/C	A	
		N/O	A	
	Conforming to UL	A	6	
Switching current	Minimum	mA	100	
Switching voltage	Rated	~ V	250	
	Maximum	V	~ 400, --- 300	
	Minimum	V	12	
Nominal load (resistive)		A / ~ V	6 / 250 V (at 50mW)	
Switching capacity	Maximum	~	VA	
		---	W	
	Minimum		mW	
Maximum operating rate In operating cycles / hour	No-load		72 000	
	Under load		360	
Mechanical durability	In millions of operating cycles		≥ 10	
Electrical durability In millions of operating cycles	Resistive load		See curves below	
	Inductive load		0.05 (N/O contact: ~250 V, 3 A, AC-15)	

Maximum switching capacity on --- load

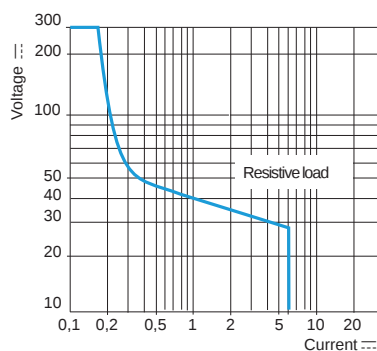

Coil characteristics							
Average consumption		---	W	0.17			
Drop-out voltage threshold		---		≥ 0.05 Uc			
Operating time (response time)	Between coil energization and making of the NO contact	---	ms	12 max			
	Between coil de-energization and making of the NC contact	---	ms	5 max			
Control circuit voltage Uc			V	12	24	48	60
Relay control voltage codes				JD	BD	ED	ND
DC supply	Average resistance at 23 °C ± 10%		Ω	848	3390	10 600	20 500
	Operating voltage limits	Min.	V	8.4	16.8	33.6	42
		Max.	V	16.8	33.6	67.2	84

Socket characteristics				
Socket type			RSLZV●●	RSLZR●●
Relay types used			RSL1●●●●	RSL1●●●●
Conforming to standards			IEC 61984, UL 508, CSA C22-2 No. 14	
Product certifications			UL, CSA, GOST	
Contact terminal arrangement			Separate	Separate
Wire connection method			Screw connector	Spring terminals
Width		mm	6.2	6.2
Electrical characteristics				
Conventional thermal current (I _{th})		A	6	
Maximum operating voltage		~ V	300	
Insulation characteristics				
Between adjacent output contacts		V _{rms}	2500	
Between input and output contacts		V _{rms}	2500	
Between contacts and DIN rail		V _{rms}	2500	
General characteristics				
Ambient air temperature around the device	Operation	°C	- 40...+ 70 (-40 to +55 for U > 80 V)	
	Storage	°C	- 40...+ 85	
Degree of protection	Conforming to IEC/EN 60529		IP 20	
Connection	Solid wire without 1 conductor cable end	mm²	0.2...2.5	0.2...1.5
		AWG	24...14	24...16
	Flexible wire 1 conductor with cable end	mm²	0.2...2.5	0.2...1.5
		AWG	24... 14	24...16
Screw size		mm	M 2.5	
Maximum tightening torque		Nm	0.5	10 N...40 N (0.2 ...1.5 mm²)
Mounting			On 35 mm DIN rail	
Mounting on DIN rail			By plastic compression spring	
Terminal reference			IEC	
LED indicator			Yes (built-in)	
Added protection in circuit			Yes (built-in)	
Wire connection method			Screw connector	Spring terminal
				

Sockets operating voltage				
		Operating voltage	Tolerance	Control circuit voltage (relay)
		V		V
Socket type	RSLZVA1, RSLZRA1	---/~ 12	+ 20% / - 5%	--- 12
		---/~ 24	+ 20% / - 10%	--- 24
	RSLZVA2, RSLZRA2	---/~ 48	+ 20% / - 10%	--- 48
		---/~ 60	+ 20% / - 10%	--- 60
	RSLZVA3, RSLZRA3	---/~ 110	+ 15% / - 20%	--- 60
	RSLZVA4, RSLZRA4	---/~ 230	+ 15% / - 20%	--- 60



RSL 1PV●●

RSL 1PR●●

Slim interface relays, pre-assembled

Standard relays mounted on socket equipped with LED and protection circuit

Sold in lots of 10

1 C/O contact - Thermal current (Ith) 6A

Operating voltage (input voltage) V	Socket type		Spring terminal		Replacement Relay
	Screw connector				
	Catalog Number	Weight kg	Catalog Number	Weight kg	Catalog Number
~/~ 12	RSL1PVJU	0.031	RSL1PRJU	0.029	RSL1AB4JD
~/~ 24	RSL1PVBU	0.031	RSL1PRBU	0.029	RSL1AB4BD
~/~ 48	RSL1PVEU	0.031	RSL1PREU	0.029	RSL1AB4ED
~/~ 110	RSL1PVFU	0.031	RSL1PRFU	0.029	RSL1AB4ND
~/~ 230	RSL1PVPU	0.031	RSL1PRPU	0.029	RSL1AB4ND

Slim interface relays for customer assembly: relay + socket

Relays with flat, reinforced pins (PCB type)

Sold in lots of 10

1 C/O contact - Thermal current (Ith) 6A

Control circuit voltage (relay coil voltage) V	Standard Catalog Number	Weight kg
~/~ 12	RSL1AB4JD	0.006
~/~ 24	RSL1AB4BD	0.006
~/~ 48	RSL1AB4ED	0.006
~/~ 60	RSL1AB4ND	0.006



RSL 1●●●●

Sockets equipped with LED and protection circuit

Sold in lots of 10

Operating voltage (input voltage) V	For use with relays	Socket type		Spring terminal	
		Screw connector			
		Catalog Number	Weight kg	Catalog Number	Weight kg
~/~ 12 and ~/~ 24	RSL1AB4JD RSL1AB4BD	RSLZVA1	0.025	RSLZRA1	0.023
~/~ 48 and ~/~ 60	RSL1AB4ED RSL1AB4ND	RSLZVA2	0.025	RSLZRA2	0.023
~/~ 110	RSL1AB4ND	RSLZVA3	0.025	RSLZRA3	0.023
~/~ 230	RSL1AB4ND	RSLZVA4	0.025	RSLZRA4	0.023



RSL ZVA●

RSL ZRA●

Accessories for sockets

Description	Compatibility	Catalog Number	Weight kg
Clip-in ID tags (2 sheets of 64 ID tags)	With all sockets	RSLZ5	0.001
Bus jumper (10 x 20-pole jumper)	With all sockets	RSLZ2	0.003
Butterfly isolator (10 isolators)	With all sockets	RSLZ3	0.001





RSL Z2





RSL Z3

Slim interface relays, pre-assembled

RSL1PV●● (screw connector)

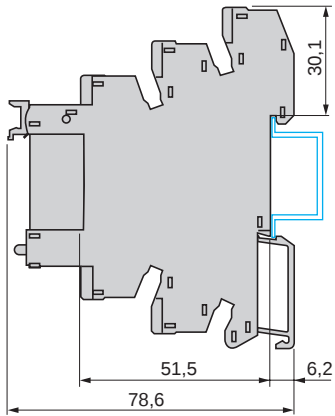


RSL1PR●● (spring terminals)

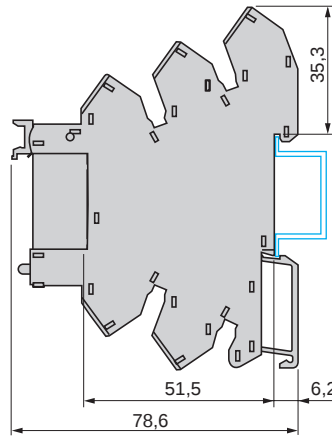


Relays

RSL1●●●● with flat, reinforced PCB pins





1 C/O contact





Sockets

RSLZV●● (screw connector)

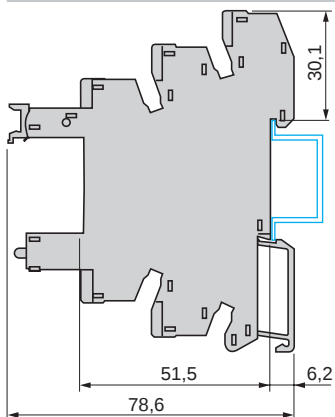


RSLZR●● (spring terminals)

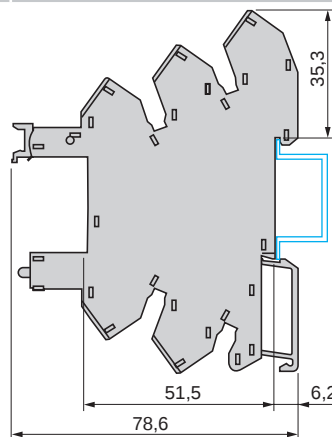


Socket connections

RSLZV●● (screw connector)

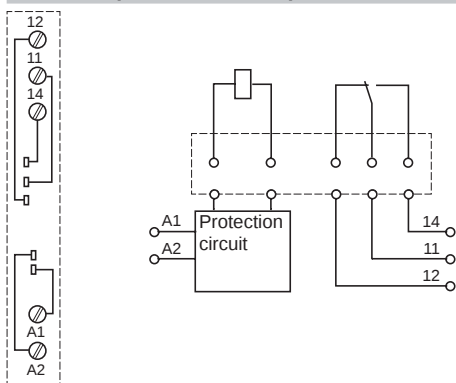


RSLZR●● (spring terminals)

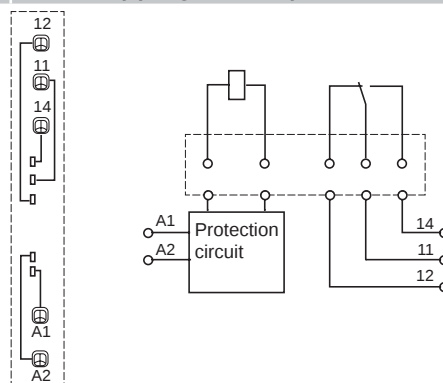

Example of RSL Z2 bus jumper mounting on sockets

Side view



- (1) A1
- (2) A2
- (3) Bus jumper polarity A1
- (4) Bus jumper polarity A2

Application		Plug-in relays	
		Interface relays	Miniature relays
			
Number and type of contacts / conventional thermal current (Ith on N/O contact)		1 C/O / 16 A 1 C/O / 12 A 2 C/O / 8 A	2 C/O / 12 A 3 C/O / 10 A 4 C/O / 6 A 4 C/O / 3 A (low level)
Control circuit voltage		24...240 V 6...110 V	24...240 V 12...220 V
Type of pins		Flat, PCB type	Quick-connect
Operational voltage		Up to ~ 400 V / ~ 300 V	Up to 250 V
Durability (operating cycles)	Electrical, resistive load	100 000	100 000
	Mechanical, no-load	30 000 000	10 000 000
Functions	LED	Yes (with protection modules)	Yes (depending on version)
	Mechanical indicator	—	Yes
	Lockable test button	—	Yes
	Low level contacts	—	Yes (depending on version)
Type reference		RSB	RXM
Pages		20	24
			
Conventional thermal current (Ith)		12 A (1)	10 A 12 A (2)
Contact terminal arrangements		Separate	Mixed Separate
Connection		Box lug connectors	Screw clamp terminals or box lug connectors Box lug connectors
Accessories	Protection modules	Yes	Yes
	Timer module	—	—
	Retention clip	Yes	Yes
	Socket ID tag	Yes	Yes (except RXZ E2M114)
	Mounting adapters for rail	—	Yes
	Mounting adapters with fixing lugs	—	Yes
	Bus jumper, 2-pole (Ith = 5 A)	—	— Yes
Associated socket types		RSZE1S●●M	RXZE2M●●● RXZE2S●●●
Pages		20	24 24

(1) When using relay RSB 1A160●● with socket RSZ E1S48M, terminals must be linked.
(2) Except for sockets RXZ E2S11●M: 10 A.

Universal relays



2 C/O / 10 A
3 C/O / 10 A
3 C/O / 3 A (low level)

2 C/O / 10 A
3 C/O / 10 A

24...230 V

12...220 V

12...110 V

Cylindrical

Quick-connect

Up to 250 V

100 000

5 000 000

Yes (depending on version)

Yes

Yes

Yes (depending on version)

–

Power relays



1 C/O / 15 A
2 C/O / 15 A
3 C/O / 15 A
4 C/O / 15 A

24...230 V

12...110 V

Quick-connect

Up to 250 V

100 000 (3)

10 000 000

Yes (depending on version)

Yes

Yes

–

RUM

32



12 A

Mixed

Separate

Box lug connectors

Yes

Yes

Yes

Yes

–

–

–

Yes

RUZC•M

RUZSC•M

RUZSF3M

32

(3) 100 000 for RPM1 and RPM2; 60 000 for RPM3 and RPM4.

32

RPM

42



16 A

Mixed

Screw clamp terminals

Yes

Yes (for 3 and 4-pole)

Yes (on socket RPZ F1)

Yes


Yes

Yes

–

RPZF•

42

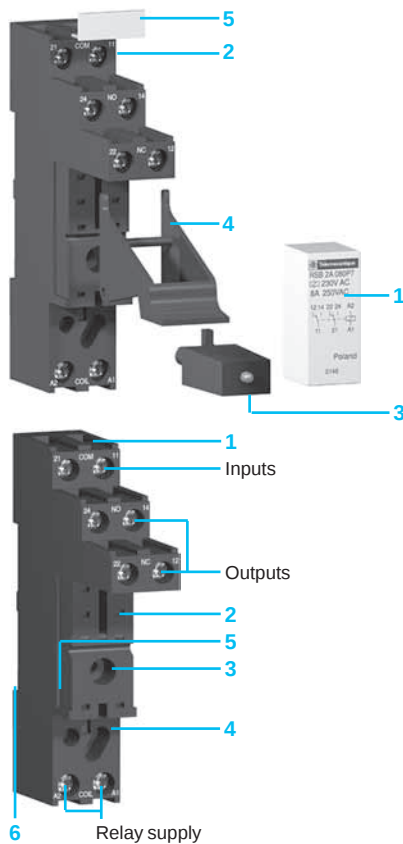

Introduction of the product range

The RSB interface relay range includes:

- 1 12 A relays with 1 C/O contact , 16 A relays with 1 C/O contact and 8 A relays with 2 C/O contacts.
- 2 Sockets with separate contact terminals.
- 3 Protection modules (diode, diode + LED, RC circuit or varistor + LED).
- 4 Plastic hold-down ejector clip for all sockets.
- 5 Clip-in ID tags for all sockets.

Socket description

Sockets with separate contact terminals (1)

- 1 Box lug connectors.
- 2 Five or eight female contacts for the relay pins.
- 3 Mounting hole for panel mounting.
- 4 Location for protection modules.
- 5 Locking components for plastic hold-down ejector clip.
- 6 Locating slot for mounting on DIN rail.

(1) The inputs and outputs are separated from the relay supply.

General characteristics

Conforming to standards			IEC/EN 61810-1, UL 508, CSA C22-2 n° 14
Product certifications			cURus File E173076 CNN NRNT2,; CSA File 215736 Class 321107; CE; RoHS compliant
Ambient air temperature around the device	Storage	°C (F)	- 40... + 85 (-40 ... +185)
	Operation	°C (F)	— - 40... + 85 (-40 ... +185), ~ - 40... + 70 (-40 ... +158)
Vibration resistance	Conforming to IEC/EN 60068-2-6		> 10 gn (10..150 Hz)
Degree of protection	Conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening		5 gn
	Closing		10 gn
Protection category			RT I
Mounting position			Any

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	400
Rated impulse withstand voltage (Uimp)		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	5000
	Between poles	~ V	2500
	Between contacts	~ V	1000

Contact characteristics

Relay type			RSB1A120●●	RSB1A160●●	RSB2A080●●
Number and type of contacts			1 C/O	1 C/O	2 C/O
Contact materials			AgNi		
Conventional thermal current (Ith)	For ambient temperature ≤ 40°C	A	12	16	8
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	N.O.	A	12	16
		N.C.	A	6	8
Switching current	Minimum	mA	5		
Switching voltage	Maximum	V	~ 400, — 300		
	Minimum	V	5		
Nominal load (resistive)		A	12 / 250 ~ V	16 / 250 ~ V	8 / 250 ~ V
		A	12 / 28 ~ V	16 / 28 ~ V	8 / 28 ~ V
Switching capacity	Maximum	~	VA	3000	4000
		—	W	336	448
	Minimum	mW	300		
Maximum operating rate In operating cycles/hour	No-load		72 000		
	Under load		600		

Introduction:
page 20

Characteristics:
page 20

Product selector:
page 22


Dimensions, Wiring diagrams:
page 23

Contact characteristics (continued)


Relay type		RSB 1A120●●	RSB 1A160●●	RSB 2A080●●
Mechanical durability	In millions of operating cycles	≥ 30		
Electrical durability	Resistive load (p.f.)	12 A, 250 V~ (≥ 0.1)	16 A, 250 V~ (≥ 0.07)	8 A, 250 V~ (≥ 0.1)
	Inductive load	See curves below		

Electrical durability of contacts


Resistive load ~



Reduction coefficient for inductive load ~
(depending on power factor cos φ)



Maximum switching capacity on resistive load



A RSB 2A080●● B RSB 1A160●● C RSB 1A120●●. Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics

Average consumption				~ 0.45 W, ~ 0.75 VA										
Drop-out voltage threshold				≥ ~ 0.1 Uc (10% of rated voltage), ≥ ~ 0.15 Uc (15% of rated voltage)										
Operating time (response time)	Between coil energization and making of the NO contact	~	ms	12										
			ms	9										
	Between coil de-energization and making of the NC contact	~	ms	10										
			ms	4										
Control circuit voltage Uc			V	6	12	24	48	60	110	120	220	230	240	
Relay control voltage codes				RD	JD	BD	ED	ND	FD	—	—	—	—	
d.c. supply	Average resistance at 20 °C ± 10%		Ω	90	360	1440	5700	7500	25 200	—	—	—	—	
	Operating voltage limits	Min.	V	4.8	9.6	19.2	38.4	48	88	—	—	—	—	
		Max.	V	6.6	13.2	26.4	52.8	66	121	—	—	—	—	
Relay control voltage codes				—	—	B7	E7	—	F7	M7	P7	U7		
a.c. supply 60 Hz	Average resistance at 20 °C ± 15%		Ω	—	—	400	1550	—	—	10 200	35 500	38 500	42 500	
	Operating voltage limits	Min.	50 Hz	V	—	—	19.2	38.4	—	96	176	184	192	
			60 Hz	—	—	20.4	40.8	—	102	187	195.5	204		
		Max.	50/60 Hz	V	—	—	26.4	57.6	—	144	264	276	288	

Socket characteristics

Socket type		RSZE1S35M	RSZE1S48M
Relay types used		RSB1A120●●	RSB2A080●●, RSB1A160●● (1)
Contact terminal arrangement		Separate	
Wire connection method		Connector	
Product certifications		CE	
Product certifications		cURus File E172326 CCN SWIV2; CSA File 212916 Class 3211 07; CE; RoHS compliant	

Electrical characteristics


Conventional thermal current (I_{th})	A	12
Maximum operating voltage	V~	300

Insulation characteristics

Between adjacent output contacts	V _{rms}	2500
Between input and output contacts	V _{rms}	2500
Between contacts and DIN rail	V _{rms}	2500

General characteristics

Ambient air temperature around the device	Operation	°C (F)	- 25...+ 85 (-13... +185)
	Storage	°C (F)	- 40...+ 85 (-40... + 185)
Degree of protection	Conforming to IEC/EN 60529		IP 20
Connection box lug connector	Solid wire without 1 conductor		0.5...2.5 mm ² - AWG 20...AWG 14
	cable end 2 conductors		0.5...1.5 mm ² - AWG 20...AWG 16
	Flexible wire with 1 conductor		0.25...2.5 mm ² - AWG 22...AWG 14
	cable end 2 conductors		0.25...1 mm ² - AWG 22...AWG 17
Maximum tightening torque / Screw size	Nm		0.8 / M3 screw
Mounting			35 mm DIN rail / panel mount
Mounting on DIN rail			By plastic compression spring
Terminal referencing			IEC
Compatibility with the metal hold-down clip			Yes, plastic
Timer module			No
Protection module			All RZM ●●●
Clip-in ID tags			Available
Wire connection method	Box lug connector		



(1) When using the relay with socket RSZE1S48M, terminals must be linked. See wiring diagrams on page 23.




RSB 1A120JD + RZM 031FPD
+ RSZ E1S35M



RSB 1A160BD + RSZ E1S48M



RSB 2A080BD + RSZ E1S48M



RSZ R215

Relays for standard applications

Control circuit voltage	Sold in lots of	Number and type of contacts - Thermal current (Ith)			Weight kg
		1 C/O - 12 A	1 C/O - 16 A	2 C/O - 8 A	
		Catalog number (1)	Catalog number (1)	Catalog number (1)	
V					
--- 6	10	RSB1A120RD	RSB1A160RD	RSB2A080RD	0.014
--- 12	10	RSB1A120JD	RSB1A160JD	RSB2A080JD	0.014
--- 24	10	RSB1A120BD	RSB1A160BD	RSB2A080BD	0.014
--- 48	10	RSB1A120ED	RSB1A160ED	RSB2A080ED	0.014
--- 60	10	RSB1A120ND	RSB1A160ND	RSB2A080ND	0.014
--- 110	10	RSB1A120FD	RSB1A160FD	RSB2A080FD	0.014
~ 24	10	RSB1A120B7	RSB1A160B7	RSB2A080B7	0.014
~ 48	10	RSB1A120E7	RSB1A160E7	RSB2A080E7	0.014
~ 120	10	RSB1A120F7	RSB1A160F7	RSB2A080F7	0.014
~ 220	10	RSB1A120M7	RSB1A160M7	RSB2A080M7	0.014
~ 230	10	RSB1A120P7	RSB1A160P7	RSB2A080P7	0.014
~ 240	10	RSB1A120U7	RSB1A160U7	RSB2A080U7	0.014

Sockets 12 A, ~ 300 V

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Separate	Box lug connectors	RSB1A120●●	10	RSZE1S35M	0.060
		RSB1A160●● (2)	10	RSZE1S48M	0.050
		RSB2A080●●			

Protection modules

Description	For use with	Voltage	Sold in lots of	Catalog number	Weight
		V			kg
Diode	All sockets	--- 6...230	10	RZM040W	0.003
RC circuit	All sockets	~ 24...60	10	RZM041BN7	0.010
		~ 110...240	10	RZM041FU7	0.010
Diode + green LED	All sockets	--- 6...24	10	RZM031RB	0.004
		--- 24...60	10	RZM031BN	0.004
		--- 110...230	10	RZM031FPD	0.004
Varistor + green LED	All sockets	--- or ~ 6...24	10	RZM021RB	0.005
		--- or ~ 24...60	10	RZM021BN	0.005
		--- or ~ 110...230	10	RZM021FP	0.005

Accessories

Description	For use with	Sold in lots of	Catalog number	Weight kg
Plastic hold-down ejector clip	All sockets	10	RSZR215	0.002
ID tag	All sockets	10	RSZL300	0.001

(1) To order a relay complete with socket (sold in lots of 20): add suffix **S** to one of the following voltage codes **JD**, **BD**, **B7**, **P7** or **F7**.


Example: **RSB2A080BD + RSZE1S48M** becomes **RSB2A080RBS**.

(2) When using the relay with socket RSZE1S48M, terminals must be linked. See wiring diagrams on page 23.


Dimensions (mm):

Interface relays

RSB1A120●●


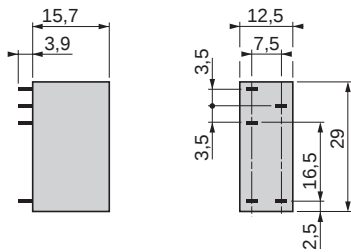


RSB2A080●●, RSB1A160●●



Sockets

RSZE1S35M

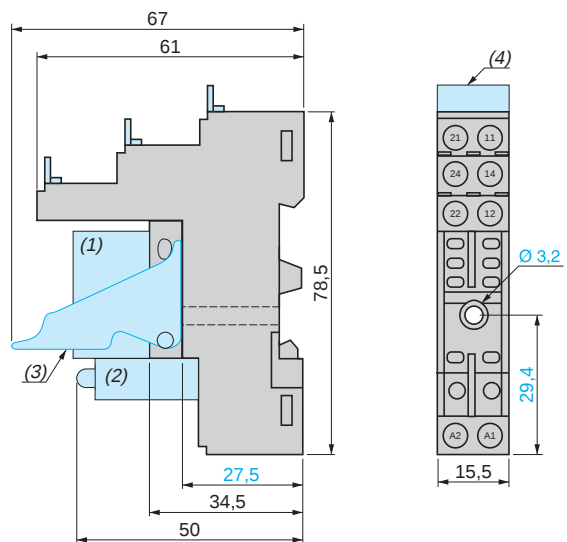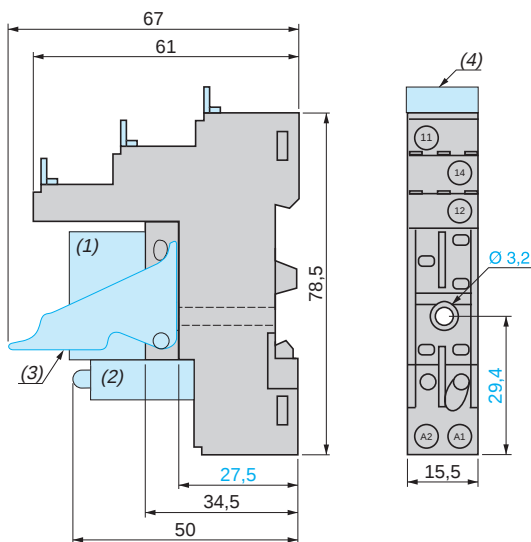


- (1) Relays
- (2) Protection module
- (3) Retention clip
- (4) ID tag


Wiring diagrams

Interface relays


RSB1A120●●

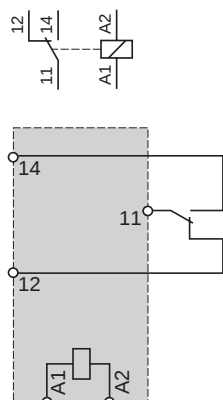

RSB1A160●●

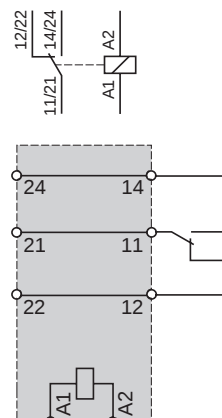


RSB2A080●●

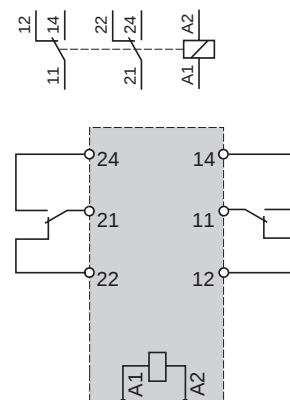


When using relay RSB 1A160●● with socket RSZ E1S48M terminals 11 and 21, 14 and 24, 12 and 22 must be linked

Protection modules


RZM040W




RZM041●●●






RZM031●●●



RZM021●●●



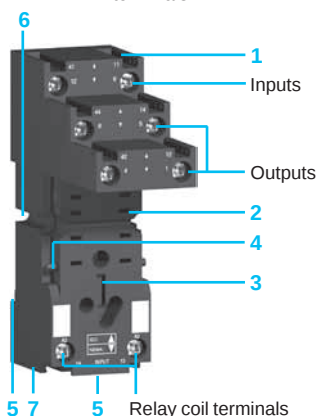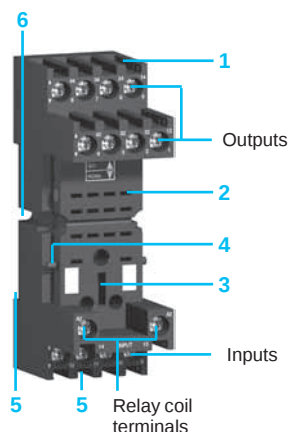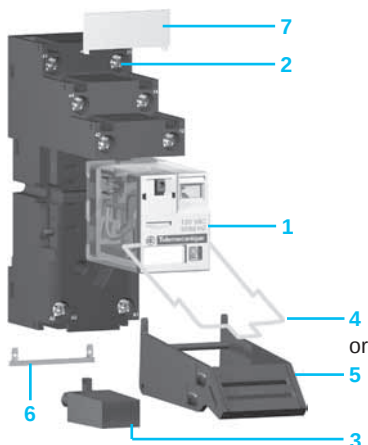

Introduction of the product range

The RXM miniature relay range includes:

- 12 A relays with 2 C/O contacts, 10 A relays with 3 C/O contacts, 6 A relays with 4 C/O contacts and 3 A "low level" relays with 4 C/O contacts. All these relays have the same dimensions.
- Sockets with mixed or separate contact terminals.
- Protection modules (diode, RC circuit or varistor).
- Metal hold-down clip for all sockets.
- Plastic hold-down ejector clip for all sockets.
- 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify wiring when creating a jumper between the coil terminals.
- Clip-in ID tags for all the sockets except RXZE2M114.

Relay description

- Spring return push-to-test button for checking contact operation (green: $\overline{\text{---}}$, red: $\sim$).
- Mechanical "relay status" indicator.
- Optional removable lock-down door enables continuous engagement of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- Bipolar LED (depending on version) indicating the relay status.
- Removable ID tag for relay identification.
- Four notches for DIN rail mounting adapter or panel mounting adapter with fixing lugs.
- Eight, eleven or fourteen quick-connect pins.
- Area by which the product can be easily gripped.
- Mounting adapter enabling direct mounting of the relay on a panel.
- Mounting adapter enabling direct mounting of the relay on a DIN rail.

Socket description

Sockets with mixed contact terminals (1)

- Connection by screw clamp terminals or box lug connector.
- Fourteen female contacts for the relay pins.
- Location for protection modules.
- Locking components for plastic and metal hold-down clips.
- Locating slot for mounting on DIN rail.
- Two or four mounting holes for panel mounting.

Sockets with separate contact terminals (2)

- Connection by screw connector.
- Eight, eleven or fourteen female contacts for the relay pins.
- Location for protection modules.
- Locking components for plastic and metal hold-down clips.
- Locating slot for mounting on DIN rail.
- Two mounting holes for panel mounting.
- Location for bus jumpers (see mounting on sockets on page 30).


(1) The inputs are mixed with the relay coil terminals, with the outputs being located on the opposite side of the socket.

(2) The inputs and outputs are separated from the relay coil terminals.

General characteristics						
Conforming to standards			IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14			
Product certifications			cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant			
Ambient air temperature around the device	Storage	°C (F)	- 40... + 85 (-40... +185)			
	Operation	°C (F)	- 40... + 55 (-40... +131)			
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz/± 1 mm / 5g/5 cycles)			
	Not operating		5 gn (10...150 Hz/± 1 mm / 5g/5 cycles)			
Degree of protection	Conforming to IEC/EN 60529		IP 40			
Shock resistance conforming to IEC/EN 60068-2-27	Opening		15 gn			
	Closing		15 gn			
Protection category			RT I			
Mounting position			Any			
Insulation characteristics						
Rated insulation voltage (Ui)		V	250 (IEC), 300 (UL, CSA)			
Rated impulse withstand voltage (Uimp)		kV	4 (1.2/50 μs)			
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550			
	Between poles	~ V	1550			
	Between contacts	~ V	1500			
Contact characteristics						
Relay type			RXM2AB●●●	RXM3AB●●●	RXM4AB●●●	RXM4GB●●●
Number and type of contacts			2 C/O	3 C/O	4 C/O	4 C/O low level
Contact materials			AgNi		AgAu - bifurcated	
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C	A	12	10	6	3
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	NO	12	10	6	2
		NC	6	5	3	1
	Conforming to UL		12	10	6	3
Switching current	Minimum	mA	10			3
Switching voltage	Maximum	V	~/--- 250 (IEC)			
	Minimum	V	17			5
Nominal load (resistive)		A	12 / 250 ~ V	10 / 250 ~ V	6 / 250 ~ V	3 / 250 ~ V
		A	12 / 28 --- V	10 / 28 --- V	6 / 28 --- V	3 / 28 --- V
Switching capacity	Maximum	~	VA	3000	2500	1500
		---	W	336	280	168
	Minimum		mW	170		15
Maximum operating rate In operating cycles	No-load		18 000			
	Under load		1200			
Utilization coefficient			20 %			
Mechanical durability		In millions of operating cycles	10			
Electrical durability In millions of operating cycles	Resistive load		0.1			
	Inductive load		See curves below			


Electrical durability of contacts

Resistive load ~




Reduction coefficient for inductive load ~

(depending on power factor cos φ)





Maximum switching capacity on resistive load ---



A RXM2AB●●● B RXM3AB●●● C RXM4AB●●● D RXM4GB●●●

Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics													
Average consumption		~	VA	1.2									
			W	0.9									
Drop-out voltage threshold		~		≥ 0.15 Uc									
				≥ 0.1 Uc									
Operating time (response time)	Between coil energization and making of the NO contact	~	ms	20									
			ms	20									
	Between coil de-energization and making of the NC contact	~	ms	20									
			ms	20									
Control circuit voltage Uc			V	12	24	48	110	120	125	220	230	240	
Relay coil voltage codes				JD	BD	ED	FD	–	GD	MD	–	–	
d.c. supply	Average resistance at 20 °C ± 10%	Ω	160	650	2600	11 000	–	11 000	14 000	–	–		
	Operating voltage limits	Min.	V	9.6	19.2	38.4	88	–	100	176	–	–	
		Max.	V	13.2	26.4	52.8	121	–	138	242	–	–	
Relay coil voltage codes				–	B7	E7		F7	–	–	P7	U7	
a.c. supply	Average resistance at 20 °C ± 15%	Ω	–	180	770	–	4430	–	–	–	15 000	15 500	
	Operating voltage limits	Min.	V	–	19.2	38.4	–	96	–	–	–	184	192
		Max.	V	–	26.4	52.8	–	132	–	–	–	253	264
Socket characteristics													
Socket type				RXZE2S108M	RXZE2S111M	RXZE2S114M	RXZE2M114M	RXZE2M114					
Relay types used				RXM2●●●●●	RXM3●●●●●	RXM4●●●●●	RXM2●●●●● (1) RXM4●●●●●	RXM2●●●●● (1) RXM4●●●●●					
Contact terminal arrangement				Separate				Mixed					
Wire connection method				Box lug connectors							Screw clamp terminals		
Product certifications				cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant									
Conforming to standards				IEC 61984, CE									
Electrical characteristics													
Conventional thermal current (Ith)			A	12	10								
Maximum operating voltage			V	250 (IEC)									
Insulation characteristics													
Between adjacent output contacts			Vrms	2500									
Between input and output contacts			Vrms	2500									
Between contacts and DIN rail			Vrms	2500									
General characteristics													
Ambient air temperature around the device	Operation	°C (F)	- 40...+ 55 (-40... +131)										
	Storage	°C (F)	- 40...+ 85 (-40... +185)										
Degree of protection			IP 20										
Connection	Solid wire without cable end	1 conductor		0.5...2.5 mm² - AWG 20...AWG 14							0.5... 1.5 mm² AWG 20...AWG 16		
		2 conductors		0.5...1.5 mm² - AWG 20...AWG 16									
	Flexible wire with cable end	1 conductor		0.25...2.5 mm² - AWG 22...AWG 14							0.25...1 mm² AWG 22...AWG 17		
		2 conductors		0.25...1 mm² - AWG 22...AWG 17									
Maximum tightening torque / Screw size			Nm	1 / M3 screw									
Mounting				35 mm DIN rail / panel mount									
Mounting on DIN rail				By red plastic clip				By metal compression spring	By red plastic clip				
Terminal referencing				IEC, NEMA									
Bus jumper (Ith: 5 A)				Yes				No					
Compatibility with the plastic hold-down ejector clip				Yes									
Compatibility with the metal hold-down clip				Yes									
Protection module				All RXM040W, RXM041●●, RXM021●●									
Clip-in ID tags				Yes							No		
Wire connection method				Box lug connector							Screw clamp terminals		
													

(1) When mounting relay RXM2●●●●● on socket RXZE2M●●●●●, the thermal current must not exceed 10 A.



RXM2AB1F7



RXM2AB2F7



RXM4GB1F7



RXM4GB2F7

Miniature relays without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)					
	2 C/O - 12 A		3 C/O - 10 A		4 C/O - 6 A	
	Catalog number	Weight	Catalog number	Weight	Catalog number	Weight
V		kg		kg		kg
--- 12	RXM2AB1JD	0.037	RXM3AB1JD	0.037	RXM4AB1JD	0.037
--- 24	RXM2AB1BD	0.037	RXM3AB1BD	0.037	RXM4AB1BD	0.037
--- 48	RXM2AB1ED	0.037	RXM3AB1ED	0.037	RXM4AB1ED	0.037
--- 110	RXM2AB1FD	0.037	RXM3AB1FD	0.037	RXM4AB1FD	0.037
--- 220	—	—	—	—	RXM4AB1MD	0.037
~ 24	RXM2AB1B7	0.037	RXM3AB1B7	0.037	RXM4AB1B7	0.037
~ 48	RXM2AB1E7	0.037	RXM3AB1E7	0.037	RXM4AB1E7	0.037
~ 120	RXM2AB1F7	0.037	RXM3AB1F7	0.037	RXM4AB1F7	0.037
~ 230	RXM2AB1P7	0.037	RXM3AB1P7	0.037	RXM4AB1P7	0.037
~ 240	—	—	—	—	RXM4AB1U7	0.037

Miniature relays with LED (sold in lots of 10)

--- 12	RXM2AB2JD	0.037	RXM3AB2JD	0.037	RXM4AB2JD	0.037
--- 24	RXM2AB2BD	0.037	RXM3AB2BD	0.037	RXM4AB2BD	0.037
--- 48	RXM2AB2ED	0.037	RXM3AB2ED	0.037	RXM4AB2ED	0.037
--- 110	RXM2AB2FD	0.037	RXM3AB2FD	0.037	RXM4AB2FD	0.037
--- 125	—	—	—	—	RXM4AB2GD	0.037
~ 24	RXM2AB2B7	0.037	RXM3AB2B7	0.037	RXM4AB2B7	0.037
~ 48	RXM2AB2E7	0.037	RXM3AB2E7	0.037	RXM4AB2E7	0.037
~ 120	RXM2AB2F7	0.037	RXM3AB2F7	0.037	RXM4AB2F7	0.037
~ 230	RXM2AB2P7	0.037	RXM3AB2P7	0.037	RXM4AB2P7	0.037

Miniature relays with low level contacts, without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts Thermal current (Ith)	
	4 C/O - 3 A	
	Catalog number	Weight
V		kg
--- 12	RXM4GB1JD	0.037
--- 24	RXM4GB1BD	0.037
--- 48	RXM4GB1ED	0.037
--- 110	RXM4GB1FD	0.037
~ 24	RXM4GB1B7	0.037
~ 48	RXM4GB1E7	0.037
~ 120	RXM4GB1F7	0.037
~ 230	RXM4GB1P7	0.037

Miniature relays with low level contacts, with LED (sold in lots of 10)

--- 12	RXM4GB2JD	0.037
--- 24	RXM4GB2BD	0.037
--- 48	RXM4GB2ED	0.037
--- 110	RXM4GB2FD	0.037
~ 24	RXM4GB2B7	0.037
~ 48	RXM4GB2E7	0.037
~ 120	RXM4GB2F7	0.037
~ 230	RXM4GB2P7	0.037
~ 240	RXM4GB2U7	0.037



RXZE2M114M
+
Relais RXM4AB2F7



RXZE2S114M
+
Relais RXM4AB2F7



RXM041●●7



REXL4●●



RXZ400

Miniature relays without LED (sold in lots of 100)					
Control circuit voltage	Number and type of contacts - Thermal current (Ith)		4 C/O - 6 A		
	2 C/O - 12 A				
	Catalog number	Weight	Catalog number	Weight	
V		kg			kg
--- 12	—	—	RXM4AB1JDTQ	0.036	
--- 24	RXM2AB1BDTQ	0.037	RXM4AB1BDTQ	0.036	
--- 48	—	—	RXM4AB1EDTQ	0.036	
--- 110	—	—	RXM4AB1FDTQ	0.036	
--- 220	—	—	RXM4AB1MDTQ	0.036	
~ 24	RXM2AB1B7TQ	0.037	RXM4AB1B7TQ	0.036	
~ 48	—	—	RXM4AB1E7TQ	0.036	
~ 120	RXM2AB1F7TQ	0.037	RXM4AB1F7TQ	0.036	
~ 230	RXM2AB1P7TQ	0.037	RXM4AB1P7TQ	0.036	

Miniature relays with LED (sold in lots of 100)					
--- 24	—	—	RXM4AB2BDTQ	0.036	
~ 24	RXM2AB2B7TQ	0.037	RXM4AB2B7TQ	0.036	
~ 230	RXM2AB2P7TQ	0.037	RXM4AB2P7TQ	0.036	

Sockets					
Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Screw clamp terminals	RXM2●●●● (3) RXM4●●●●	10	RXZE2M114 (1)	0.048
	Box lug connector	RXM2●●●● (3) RXM4●●●●	10	RXZE2M114M (1)	0.056
Separate	Box lug connector	RXM2●●●●	10	RXZE2S108M (2)	0.058
		RXM3●●●●	10	RXZE2S111M (1)	0.066
		RXM4●●●●	10	RXZE2S114M (1)	0.070

Protection modules					
Description	Voltage	For use with	Sold in lots of	Catalog number	Weight kg
	V				kg
Diode	--- 6...250	All sockets	20	RXM040W	0.003
RC circuit	~ 24...60	All sockets	20	RXM041BN7	0.010
	~ 110...240	All sockets	20	RXM041FU7	0.010
Varistor	~ / --- 6...24	All sockets	20	RXM021RB	0.030
	~ / --- 24...60	All sockets	20	RXM021BN	0.030
	~ / --- 110...240	All sockets	20	RXM021FP	0.030

Timing relays				
Description	For use with	Catalog number	Weight kg	
2 or 4 timed C/O contacts (function A)	Sockets RXZE●●●●●	REXL2●● (4)	—	
		REXL4●● (4)	—	

Accessories				
Description	For use with	Sold in lots of	Catalog number	Weight kg
Metal hold-down clip	All sockets	10	RXZ400	0.001
Plastic hold-down ejector clip	All sockets	10	RXZR335	0.005
Bus jumper 2-pole (Ith: 5 A)	All sockets with separate contacts	10	RXZS2	0.005
Mounting adapter for DIN rails (5)	All relays	10	RXZE2DA	0.004
Mounting adapter with fixing lugs for panel	All relays	10	RXZE2FA	0.002
Clip-in ID tags	All relays (sheet of 108 ID tags)	10	RXZL520	0.080
	All sockets except RXZ E2M114	10	RXZL420	0.001

(1) Thermal current Ith: 10 A

(2) Thermal current Ith: 12 A

(3) When mounting relay RXM2●●●●● on socket RXZE2M●●●●●, the thermal current must not exceed 10 A.

(4) Please consult the "Zelio Time - timing relays" catalog.

(5) Test button becomes inaccessible.

Dimensions (mm):

Miniature relays

RXM●●●●●●






RXM2

RXM3

RXM4

Common view



Pin side view



Sockets

RXZE2M114

RXZE2M114M


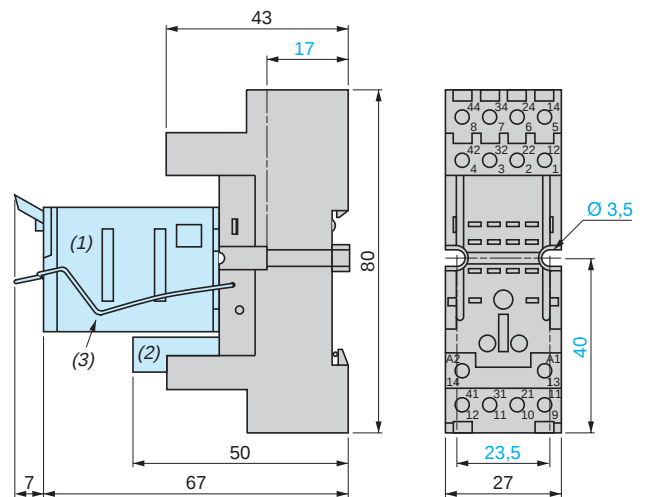
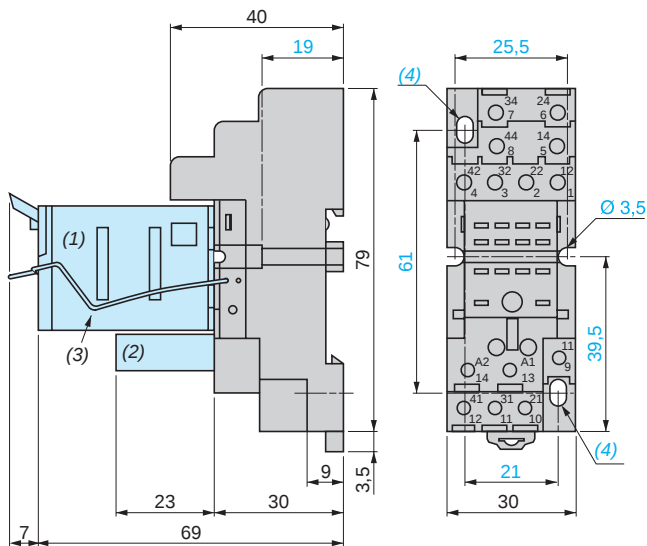


Common side view

RXZE2S108M

RXZE2S111M

RXZE2S114M

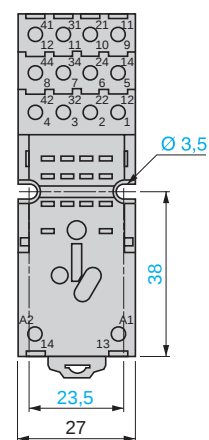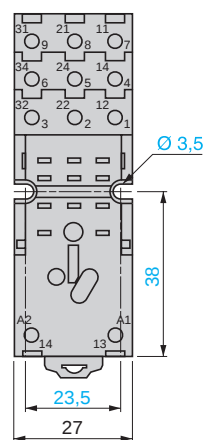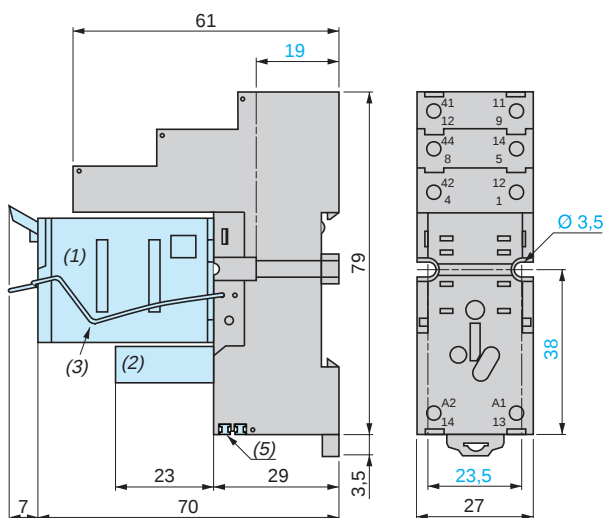

- (1) Relay
- (2) Protection module
- (3) Metal hold-down clip
- (4) 2 elongated holes $\varnothing 3.5 \times 6.5$
- (5) 2 bus jumpers




Dimensions (mm):

Plastic hold-down clip and clip-in ID tags

RXZR335

RXZL420

Mounting on all sockets (1)

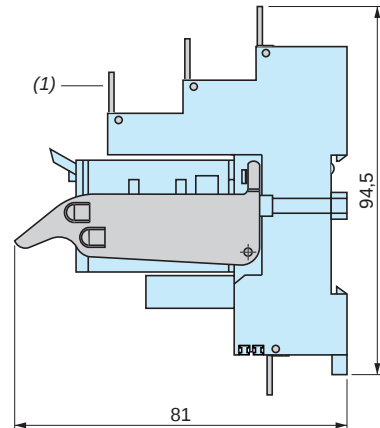



(1) Clip-in ID tags for all sockets except RXZE2M114

Bus jumper

RXZS2


Mounting on sockets with separate contacts
(view from below)

Example of bus jumper mounting on sockets

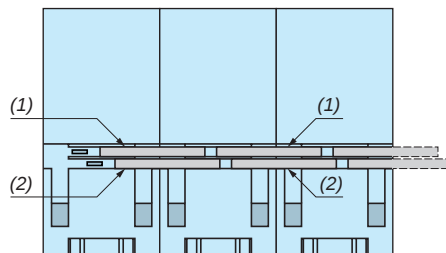
(1) 2 bus jumpers (polarity A2)
(2) 2 bus jumpers (polarity A1)

Metal hold-down clip

RXZ400







Mounting adapter for DIN rails (1)

RXZE2DA

Mounting adapter for panel

RXZE2FA


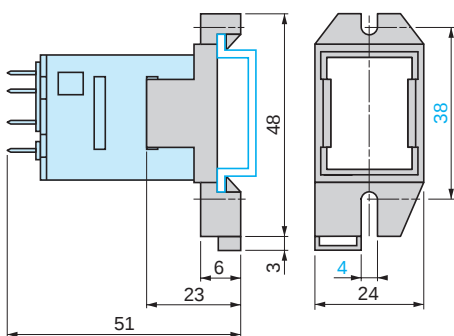


(1) Test button becomes inaccessible



Internal connections

Miniature relays



RXM2●●●●●



RXM3●●●●●




RXM4●●●●●




Symbols shown in blue correspond to Nema marking.

Sockets

RXZE2M114

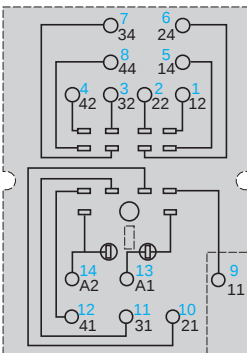


RXZE2M114M

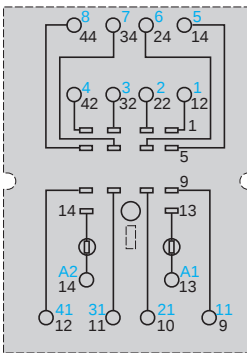


Symbols shown in blue correspond to Nema marking.


RXZE2S108M



RXZE2S111M




RXZE2S114M




Symbols shown in blue correspond to Nema marking.

Protection modules


RXM040W




RXM041●●●



RXM021●●●



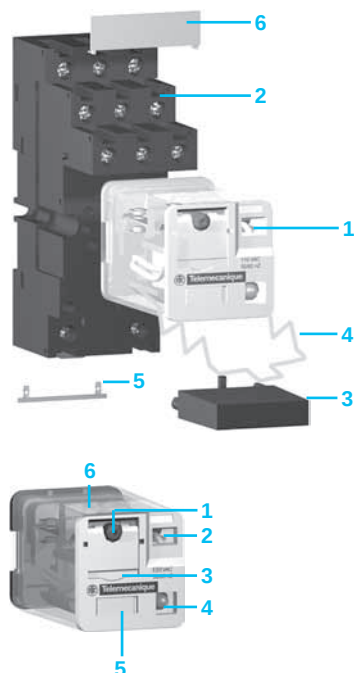


Introduction of the product range

The RUM universal relay range includes:

- 1 10 A relays with 2 and 3 C/O contacts, with cylindrical or quick-connect terminals, and 3 A low level relays with 3 C/O contacts, with cylindrical pins. All RUM relays have the same dimensions.
- 2 Sockets with mixed or separate contact terminals.
- 3 Protection modules (diode, RC circuit or varistor) or 1 timer module.
- 4 Metal hold-down clip for all sockets.
- 5 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify wiring when creating a jumper between the coil terminals.
- 6 Clip-in ID tags for the sockets.

Relay description


- 1 Spring return push-to-test button for checking contact operation (green: $\overline{\text{---}}$, red: $\sim$).
- 2 Mechanical "relay status" indicator.
- 3 Optional removable lock-down door enables continuous engagement of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 Bipolar LED (depending on version) indicating the relay status.
- 5 Removable ID tag for relay identification.
- 6 Area by which the product can be easily gripped.
- 7 Eight or eleven cylindrical pins.
- 8 Eight or eleven quick-connect pins

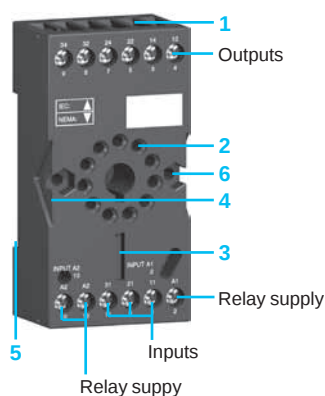

Socket description

Sockets with mixed contact terminals (1)

- 1 Box lug connectors.
- 2 Eight or eleven female contacts for the relay cylindrical pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal hold-down clip.
- 5 Locating slot for mounting on DIN rail.
- 6 Two mounting holes for panel mounting.

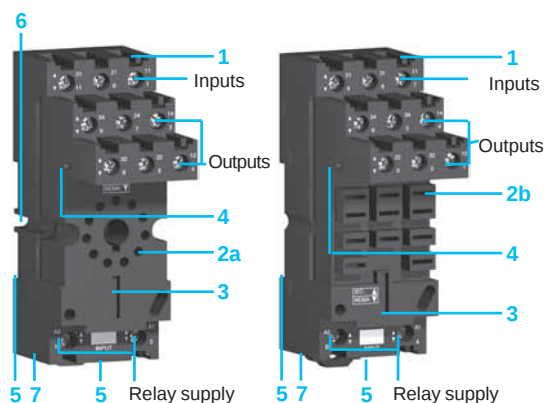

Sockets with separate contact terminals (2)

- 1 Box lug connectors.
- 2 a Eight or eleven female contacts for the relay cylindrical pins.
b Eleven female contacts for the relay flat pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal hold-down clip.
- 5 Locating slot for mounting on DIN rail.
- 6 Two mounting holes for panel mounting.
- 7 Location for bus jumpers (see mounting on sockets on page 38).

(1) The inputs are mixed with the relay coil terminals, with the outputs being located on the opposite side of the socket.


(2) The inputs and outputs are separated from the relay coil terminals.

General characteristics			
Conforming to standards			IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14
Product certifications			cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant
Ambient air temperature around the device	Storage	°C (F)	- 40... + 85 (-40... +185)
	Operation	°C (F)	- 40... + 55 (-40... +131)
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz/± 1 mm / 5g/5 cycles)
	Not operating		4 gn (10...150 Hz/± 1 mm / 5g/5 cycles)
Degree of protection	Conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening		10 gn
	Closing		10 gn
Protection category			RT I
Mounting position			Any


Insulation characteristics			
Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uimp)		kV	4 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550
	Between poles	~ V	1550
	Between contacts	~ V	1500

Contact characteristics			
Relay type			
Number and type of contacts			
Contact materials			
Conventional thermal current (Ith)	For ambient temperature ≤ 55°C	A	10
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	NO	A
		NC	A
	Conforming to UL		A
Switching current	Minimum		mA
	Maximum		V
Switching voltage	Maximum		V
	Minimum		V
Nominal load (resistive)		A	10 / 250 ~ V
		A	10 / 28 ~ V
Switching capacity	Maximum	~	VA
		---	W
	Minimum		mW
Maximum operating rate	No-load		
	Under load		
Utilization coefficient			20 %
Mechanical durability		In millions of operating cycles	5
Electrical durability	Resistive load		0.1
	Inductive load		See curves below


Electrical durability of contacts
Resistive load ~



Reduction coefficient for inductive load ~
(depending on power factor cos φ)




Maximum switching capacity on resistive load



A RUMF3000, RUMC2000, RUMC3A000 B RUMC3G000

Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics													
Average consumption		 	VA	2...3									
			W	1.4									
Drop-out voltage threshold		 		≥ 0.15 Uc									
				≥ 0.1 Uc									
Operating time (response time)	Between coil energization and making of the NO contact	 	ms	20									
			ms	20									
	Between coil de-energization and making of the NC contact	 	ms	20									
			ms	20									
Control circuit voltage Uc			V	12	24	48	60	110	120	125	220	230	
Relay coil voltage codes				JD	BD	ED	ND	FD	–	GD	MD	–	
d.c. supply	Average resistance at 20 °C ± 10%		Ω	120	470	1800	2790	10 000	–	10 000	3700	–	
	Operating voltage limits	Min.	V	9.6	19.2	38.4	48	88	–	100	176	–	
		Max.	V	13.2	26.4	52.8	66	121	–	137.5	242	–	
Relay control voltage codes				–	B7	E7	–	–	F7	–	–	P7	
a.c. supply	Average resistance at 20 °C ± 15%		Ω	–	72	290	–	–	1700	–	–	7200	
	Operating voltage limits	Min.	V	–	19.2	38.4	–	–	96	–	–	184	
		Max.	V	–	26.4	52.8	–	–	132	–	–	253	
Socket characteristics													
Socket type				RUZC2M		RUZC3M		RUZSC2M		RUZSC3M		RUZSF3M	
Relay types used				RUMC2●●●●●		RUMC3●●●●●		RUMC2●●●●●		RUMC3●●●●●		RUMF●●●●●	
Contact terminal arrangement				Mixed				Separate					
Wire connection method				Connector									
Product certifications				cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant									
Conforming to standards				IEC 61984, CE									
Electrical characteristics													
Conventional thermal current (Ith)			A	10				12					
Maximum operating voltage			V	250 (IEC)									
Insulation characteristics													
Between adjacent output contacts			Vrms	2500									
Between input and output contacts			Vrms	2500									
Between contacts and DIN rail			Vrms	2500									
General characteristics													
Ambient air temperature around the device	Operation		°C (F)	- 40...+ 55 (-40... +131)									
	Storage		°C (F)	- 40...+ 85 (-40.... +185)									
Degree of protection		Conforming to IEC/EN 60529		IP 20									
Connection	Solid wire	1 conductor		0.5...2.5 mm² - AWG 20...AWG 14									
		2 conductors		0.5...1.5 mm² - AWG 20...AWG 16									
	Flexible wire with cable end	1 conductor		0.25...2.5 mm² - AWG 22...AWG 14									
		2 conductors		0.25...1 mm² - AWG 22...AWG 17									
Maximum tightening torque / Screw size			Nm	1 / M3.3 screw									
Mounting				35 mm DIN rail / panel									
Mounting on DIN rail				By red plastic clip									
Terminal referencing				IEC, NEMA									
Bus jumper (Ith: 5 A)				No				Yes					
Compatibility with the metal hold-down clip				Yes									
Timer module				Yes									
Protection module				All RUW24●●●									
Clip-in ID tags				No				Yes					
Wire connection method			Box lug connector										



RUM●●AB1F7



RUM●●AB2F7

Product selection

Relays for standard applications, without LED (sold in lots of 10)

Pins	Control circuit voltage	Number and type of contacts - Thermal current (Ith)		3 C/O - 10 A	
		2 C/O - 10 A	Weight	Catalog number	Weight
	V		kg		kg
Cylindrical	--- 12	RUMC2AB1JD	0.085	RUMC3AB1JD	0.088
	--- 24	RUMC2AB1BD	0.085	RUMC3AB1BD	0.088
	--- 48	RUMC2AB1ED	0.085	RUMC3AB1ED	0.088
	--- 60	—	—	RUMC3AB1ND	0.088
	--- 110	RUMC2AB1FD	0.085	RUMC3AB1FD	0.088
	--- 125	—	—	RUMC3AB1GD	0.088
	--- 220	—	—	RUMC3AB1MD	0.088
	~ 24	RUMC2AB1B7	0.085	RUMC3AB1B7	0.088
	~ 48	RUMC2AB1E7	0.085	RUMC3AB1E7	0.088
	~ 120	RUMC2AB1F7	0.085	RUMC3AB1F7	0.088
	~ 230	RUMC2AB1P7	0.085	RUMC3AB1P7	0.088
Flat (quick-connect)	--- 12	RUMF2AB1JD	0.080	RUMF3AB1JD	0.082
	--- 24	RUMF2AB1BD	0.080	RUMF3AB1BD	0.082
	--- 48	RUMF2AB1ED	0.080	RUMF3AB1ED	0.082
	--- 110	RUMF2AB1FD	0.080	RUMF3AB1FD	0.082
	~ 24	RUMF2AB1B7	0.080	RUMF3AB1B7	0.082
	~ 48	RUMF2AB1E7	0.080	RUMF3AB1E7	0.082
	~ 120	RUMF2AB1F7	0.080	RUMF3AB1F7	0.082
	~ 230	RUMF2AB1P7	0.080	RUMF3AB1P7	0.082

Relays for standard applications, with LED (sold in lots of 10)

Cylindrical	--- 12	RUMC2AB2JD	0.085	RUMC3AB2JD	0.088
	--- 24	RUMC2AB2BD	0.085	RUMC3AB2BD	0.088
	--- 48	RUMC2AB2ED	0.085	RUMC3AB2ED	0.088
	--- 60	—	—	RUMC3AB2ND	0.088
	--- 110	RUMC2AB2FD	0.085	RUMC3AB2FD	0.088
	--- 125	—	—	RUMC3AB2GD	0.088
	~ 24	RUMC2AB2B7	0.085	RUMC3AB2B7	0.088
	~ 48	RUMC2AB2E7	0.085	RUMC3AB2E7	0.088
	~ 120	RUMC2AB2F7	0.085	RUMC3AB2F7	0.088
	~ 230	RUMC2AB2P7	0.085	RUMC3AB2P7	0.088
Flat (quick-connect)	--- 12	RUMF2AB2JD	0.084	RUMF3AB2JD	0.082
	--- 24	RUMF2AB2BD	0.084	RUMF3AB2BD	0.082
	--- 48	RUMF2AB2ED	0.084	RUMF3AB2ED	0.082
	--- 110	RUMF2AB2FD	0.084	RUMF3AB2FD	0.082
	~ 24	RUMF2AB2B7	0.084	RUMF3AB2B7	0.082
	~ 48	RUMF2AB2E7	0.084	RUMF3AB2E7	0.082
	~ 120	RUMF2AB2F7	0.084	RUMF3AB2F7	0.082
	~ 230	RUMF2AB2P7	0.084	RUMF3AB2P7	0.082

Relays with low level contacts, with LED (sold in lots of 10)

Pins	Control circuit voltage	Number and type of contacts		Thermal current (Ith)	
		3 C/O - 3 A		Catalog number	Weight
	V				kg
Cylindrical	--- 24			RUMC3GB2BD	0.086
	--- 48			RUMC3GB2ED	0.086
	~ 24			RUMC3GB2B7	0.086
	~ 48			RUMC3GB2E7	0.086
	~ 120			RUMC3GB2F7	0.086
	~ 230			RUMC3GB2P7	0.086



RUC3M + relais RUMC3.....



RUW241P7



RUW101MW



RUZC200



RUZS2

Product selection (continued)

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Box lug connector	RUMC2.....	10	RUZC2M	0.054
		RUMC3.....	10	RUZC3M	0.054
Separate	Box lug connector	RUMC2.....	10	RUZSC2M	0.095
		RUMC3.....	10	RUZSC3M	0.100
		RUMF2.....	10	RUZSF3M	0.095
		RUMF3.....			

Protection modules

Description	For use with	Voltage	Sold in lots of	Catalog number	Weight kg
		V			kg
Diode	All sockets	~ 6...250	10	RUW240BD	0.004
RC circuit	All sockets	~ 110...240	10	RUW241P7	0.004
Varistor	All sockets	~ 24	10	RUW242B7	0.004
		~ 240	10	RUW242P7	0.004

Timer module

Description	For use with	Voltage	Catalog number	Weight kg
		V		kg
Multifunction	All sockets	~ 24... 240	RUW101MW	0.020

Timing relays

Description	For use with	Catalog number	Weight kg
2 timed C/O contacts (single-function or multifunction)	On sockets RUZ C●M	RE48A ●● (1)	—

Accessories


Description	For use with	Sold in lots of	Catalog number	Weight kg
Metal hold-down clip	All sockets	10	RUZC200	0.001
Bus jumper 2-pole (Ith : 5 A)	All sockets with separate contacts	10	RUZS2	0.005
Clip-in ID tags	All relays (sheet of 108 ID tags)	10	RXZL520	0.080
	All sockets with separate contacts	10	RUZL420	0.001

(1) Please consult the "Zelio Time timing relays" catalog.


Dimensions (mm):

Universal relays

RUMC●●

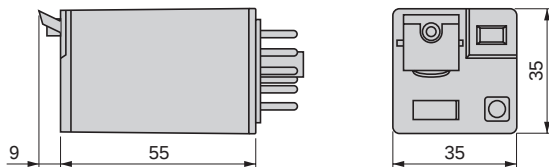


RUMF●●

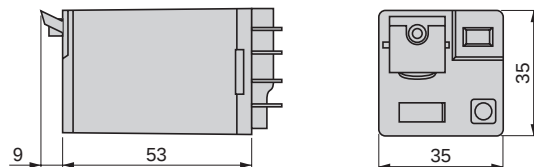


Sockets


Common side view

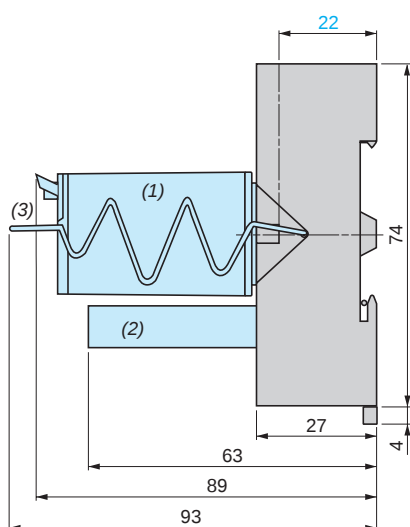


RUZC2M

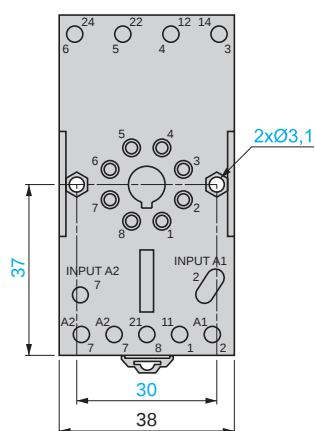


RUZC3M

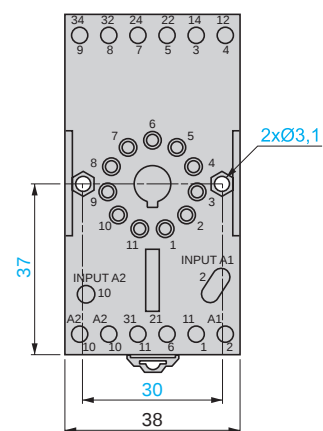

RUZSC2M

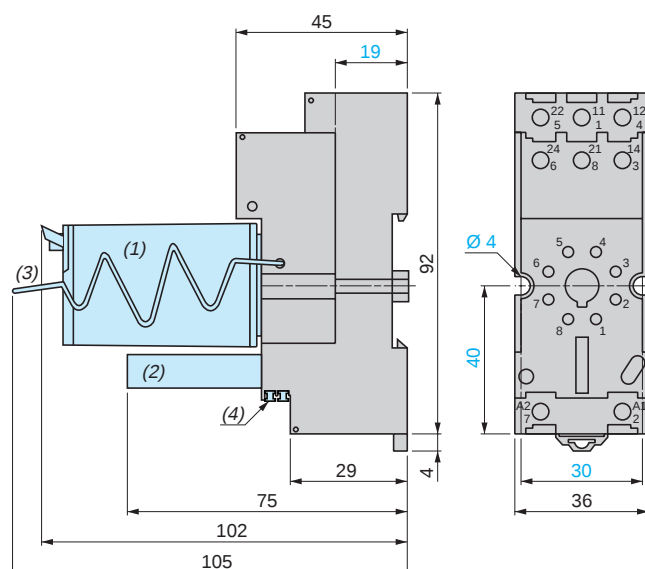

RUZSC3M

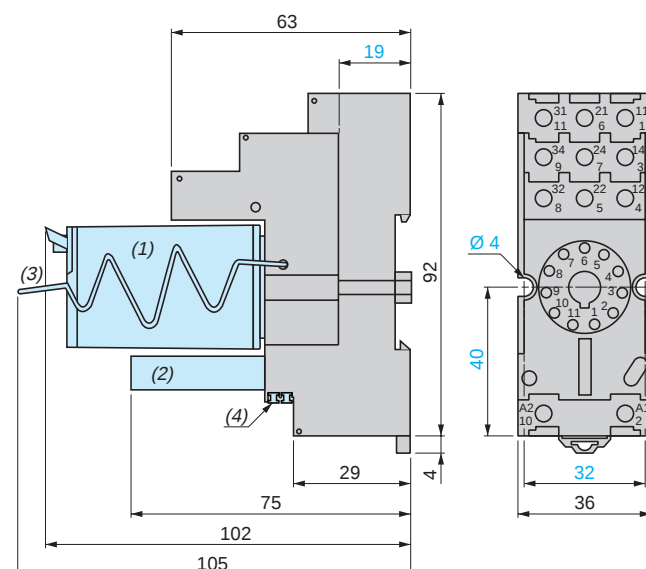


- (1) Relays
- (2) Protection module
- (3) Retention clip
- (4) 2 bus jumpers

Dimensions (mm):

Sockets (continued)

RUZSF3M

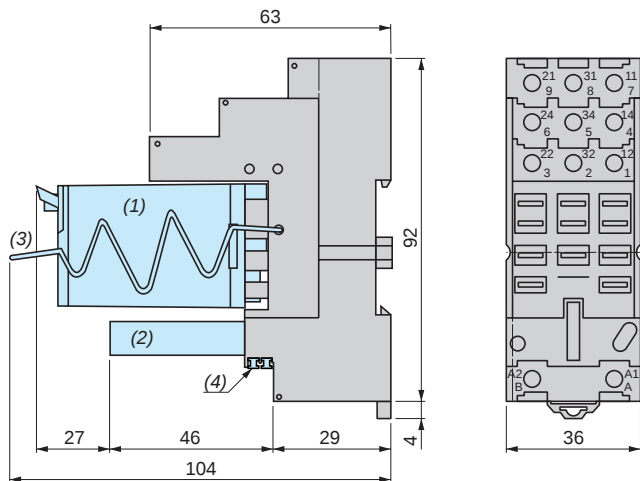


- (1) Relays
- (2) Protection module
- (3) Retention clip
- (4) 2 bus jumpers



Metal hold-down clip and plastic ID tags

RUZC200

Mounting



RUZL420

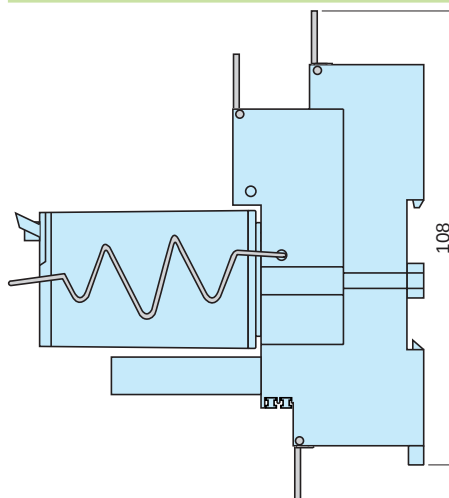



Bus jumper

RUZS2

Mounting on sockets with separate contacts (view from below)

Example of bus jumper mounting on sockets

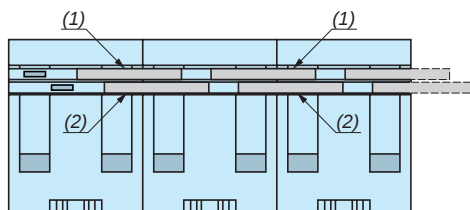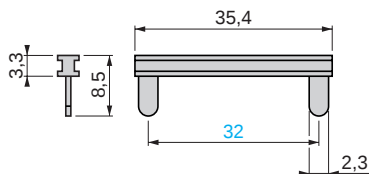


- (1) 2 bus jumpers (polarity A2)
- (2) 2 bus jumpers (polarity A1)


Wiring diagrams

Universal relays


RUM2AB●●●




RUMC3●●●●●




RUMF3AB●●●




RUMC2AB●●●




RUMF2AB●●●



RUMC3●●●●●




RUMF3AB●●●




Symbols shown in blue correspond to Nema marking.

Sockets


RUZC2M




RUZC3M



RUZSC2M




RUZSC3M



Symbols shown in blue correspond to Nema marking.

RUZSF3M






Symbols shown in blue correspond to Nema marking.

Wiring diagrams (continued)

Protection modules

RUW240BD RUW241P7 RUW242●●




Multifunction timer module RUW101MW

Programming

Timing range selection

Function selection
Timing range selection



0.1...1 s



0.1...10 s



0.1...1 min



1...10 min



0.1...1 h



1...10 h



0.1...1 day



1...10 days

Function selection

Selection	Function	Control	Function diagram	Control scheme
	On-delay Timer E	Series control		
	Monostable with maintained control Wu	Series control		
	Flashing relay, starting On-delay phase Bi	Series control		
	Flashing relay, starting Off-delay phase Bp	Series control		
	Off-delay timer R	Control by external contact (S)		
	Monostable with pulse control Ws	Control by external contact (S)		
	Monostable, starting on de-energization Wa	Control by external contact (S)		
	On-delay Timer Es	Control by external contact (S)		

Power off

Contact open

U : voltage





S : external control

Power on

Contact closed

R : relay RUM ●●●

t : adjustable time delay

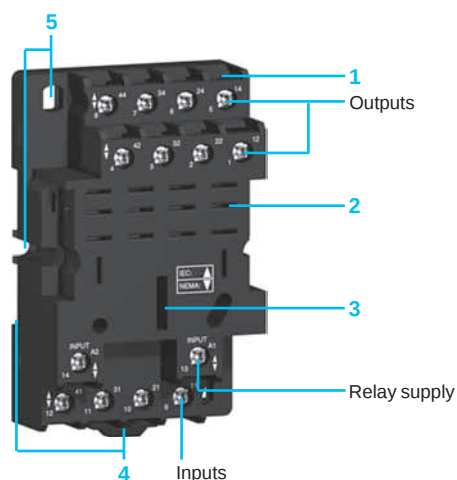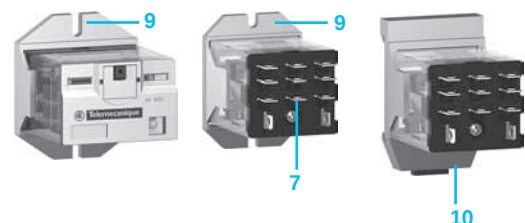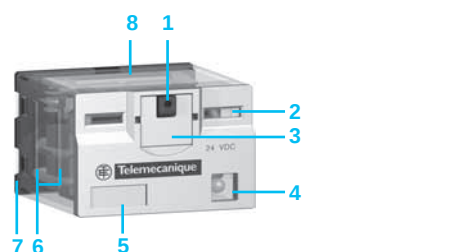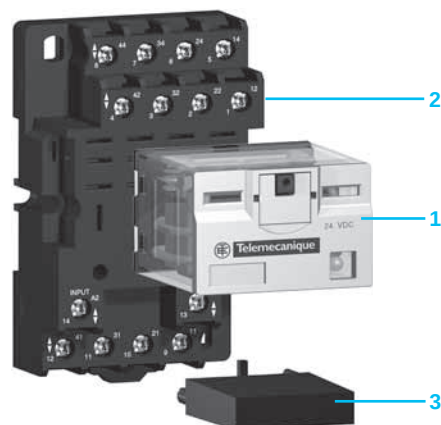

Introduction of the product range

The RPM power relay range includes:

- 15 A relays with 1, 2, 3 and 4 C/O (SPDT, DPDT, 3PDT and 4PDT) contacts.
- Sockets with mixed contact terminals.
- Protection modules (diode, RC circuit or varistor) or 1 timer module. Please note that the timer module can only be used with 3-pole or 4-pole sockets.
- Metal hold-down clip for single-contact relays (not shown).

Relay description

- Spring return push-to-test button for checking contact operation (green: $\overline{\text{---}}$, red: $\sim$).
- Mechanical "relay status" indicator.
- Removable lock-down door enables continuous engagement of the contacts for testing or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- Bipolar LED (depending on version) indicating the relay status.
- Removable ID tag for relay identification.
- Four notches for DIN rail mounting adapter or panel mounting adapter with fixing lugs.
- Five, eight, eleven or fourteen quick-connect pins.
- Area by which the product can be easily gripped.
- Mounting adapter enabling direct mounting of the relay on a panel.
- Mounting adapter enabling direct mounting of the relay on a DIN rail.

Socket description

Sockets with mixed contact terminals (1)

- Connection by screw clamp terminals.
- Five, eight, eleven or fourteen female contacts for the relay pins.
- Location for protection modules or the timer module.
- Locating slot for mounting on DIN rail with mounting clip.
- Two or four mounting holes for panel mounting.


(1) The inputs are mixed with the relay coil terminals,, with the outputs being located on the opposite side of the socket.

General characteristics			
Conforming to standards			IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14
Product certifications			cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant
Ambient air temperature around the device	Storage	°C (F)	- 40... + 85 (-40... +185)
	Operation	°C (F)	- 40... + 55 (-40... +131)
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz/± 1 mm / 5g/5 cycles)
	Not operating		5 gn (10...150 Hz/± 1 mm / 5g/5 cycles)
Degree of protection	Conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening		15 gn
	Closing		15 gn
Protection category			RT I
Mounting position			Any


Insulation characteristics			
Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uimp)		kV	4 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550
	Between poles	~ V	1550
	Between contacts	~ V	1500

Contact characteristics						
Relay type			RPM1●●●	RPM2●●●	RPM3●●●	RPM4●●●
Number and type of contacts			1 C/O	2 C/O	3 C/O	4 C/O
Contact materials			AgNi			
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C		A	15		
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC		NO	A	15	
			NC	A	7.5	
	Conforming to UL			A	15	
Switching current	Minimum		mA	10		
Switching voltage	Maximum		V	~/--- 250 (IEC)		
	Minimum		V	17		
Nominal load (resistive)			A	15 / 250 ~ V		
			A	15 / 28 --- V		
Switching capacity	Maximum	~	VA	3750		
		---	W	420		
	Minimum		mW	170		
Maximum operating rate In operating cycles/hour	No-load			18 000		
	Under load			1200		
Utilization coefficient				20 %		
Mechanical durability	In millions of operating cycles			10		
Electrical durability In millions of operating cycles	Resistive load			0.1		
	Inductive load			0.06		
				See curves below		


Electrical durability of contacts
Resistive load ~




Reduction coefficient for inductive load ~
(depending on power factor cos φ)



Maximum switching capacity on resistive load ---



Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics											
Relay type				RPM1●●●		RPM2●●●		RPM3●●●		RPM4●●●	
Average consumption		~ 	VA	0.9		1.2		1.5		1.5	
			W	0.7		0.9		1.7		2	
Drop-out voltage threshold		~ 		≥ 0.15 Uc							
				≥ 0.1 Uc							
Operating time (response time)	Between coil energization and making of the NO contact	~ 	ms	20		25		25		20	
			ms	20		25		25		20	
	Between coil de-energization and making of the NC contact	~ 	ms	20							
			ms	20							
Control circuit voltage Uc			V	12	24	48	110	120	230		
Relay control voltage codes				JD	BD	ED	FD	–	–		
d.c. supply	Average resistance at 20 °C ± 10%	RPM1●●●	Ω	180	750	2600	13 100	–	–		
		RPM2●●●	Ω	160	650	2600	11 000	–	–		
		RPM3●●●	Ω	100	400	2600	8600	–	–		
		RPM4●●●	Ω	96	388	1550	7340	–	–		
	Operating voltage limits	Min.	V	9.6	19.2	38.4	88	–	–		
		Max.	V	13.2	26.4	52.8	121	–	–		
Relay control voltage codes				–	B7	E7	–	F7	P7		
a.c. supply	Average resistance at 20 °C ± 15%	RPM1●●●	Ω	–	160	720	–	4430	15 720		
		RPM2●●●	Ω	–	180	770	–	4430	15 000		
		RPM3●●●	Ω	–	103	770	–	2770	12 000		
		RPM4●●●	Ω	–	84.3	338	–	2220	9120		
	Operating voltage limits	Min.	V	–	19.2	38.4	–	96	184		
		Max.	V	–	26.4	52.8	–	132	253		
Socket characteristics											
Socket type				RPZF1			RPZF2		RPZF3		RPZF4
Relay types used				RPM1●●●			RPM2●●●		RPM3●●●		RPM4●●●
Protection module types used				RXM02●●● RXM04●●●			RXM02●●● RXM04●●●		RUW24●●●		RUW24●●●
Contact terminal arrangement				Mixed							
Wire connection method				Screw clamp terminals							
Product certifications				cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant							
Conforming to standards				IEC 61984, CÉ							
Electrical characteristics											
Conventional thermal current (Ith)				A	16						
Maximum operating voltage				V	250 (IEC)						
Insulation characteristics											
Between adjacent output contacts				Vrms	2500						
Between input and output contacts				Vrms	2500						
Between contacts and DIN rail				Vrms	2500						
General characteristics											
Ambient air temperature around the device	Operation			°C	- 40...+ 55						
	Storage			°C	- 40...+ 85						
Degree of protection		Conforming to IEC/EN 60529			IP 20						
Connection	Solid wire	1 conductor		0.5...1.5 mm² - AWG 20...AWG 16			0.5...2.5 mm² - AWG 20...AWG 14				
		2 conductors		0.5...1.5 mm² - AWG 20...AWG 16			0.5...2.5 mm² - AWG 20...AWG 14				
	Flexible wire with cable end	1 conductor		0.25...1 mm² - AWG 22...AWG 17			0.25...1.5 mm² - AWG 22...AWG 16				
		2 conductors		0.25...1 mm² - AWG 22...AWG 17			0.25...1.5 mm² - AWG 22...AWG 16				
Maximum tightening torque / Screw size				Nm	1 / M3 screw			1 / M3.5 screw			
Mounting				35 mm DIN rail / panel mount							
Mounting on DIN rail				By red plastic clip							
Terminal referencing				IEC, NEMA							
Compatibility with the metal hold-down clip				Yes			No				
Timer module compatibility				No					Yes		
Protection module				RXM040W, RXM041●●, RXM021●●					RUW24●●		
Clip-in ID tags				No							
Wire connection method	Screw clamp terminals										



RPM41BD

Power relays without LED (sold in lots of 10)								
Control circuit voltage	Number and type of contacts - Thermal current (Ith)							
	1 C/O - 15 A		2 C/O - 15 A		3 C/O - 15 A		4 C/O - 15 A	
	Catalog number	Weight	Catalog number	Weight	Catalog number	Weight	Catalog number	Weight
V		kg		kg		kg		kg
--- 12	RPM11JD	0.026	RPM21JD	0.036	RPM31JD	0.054	RPM41JD	0.071
--- 24	RPM11BD	0.026	RPM21BD	0.036	RPM31BD	0.054	RPM41BD	0.071
--- 48	RPM11ED	0.026	RPM21ED	0.036	RPM31ED	0.054	RPM41ED	0.071
--- 110	RPM11FD	0.026	RPM21FD	0.036	RPM31FD	0.054	RPM41FD	0.071

~ 24	RPM11B7	0.026	RPM21B7	0.036	RPM31B7	0.054	RPM41B7	0.071
~ 48	RPM11E7	0.026	RPM21E7	0.036	RPM31E7	0.054	RPM41E7	0.071
~ 120	RPM11F7	0.026	RPM21F7	0.036	RPM31F7	0.054	RPM41F7	0.071
~ 230	RPM11P7	0.026	RPM21P7	0.036	RPM31P7	0.054	RPM41P7	0.071



RPM42BD

Power relays with LED (sold in lots of 10)								
--- 12	RPM12JD	0.026	RPM22JD	0.036	RPM32JD	0.054	RPM42JD	0.071
--- 24	RPM12BD	0.026	RPM22BD	0.036	RPM32BD	0.054	RPM42BD	0.071
--- 48	RPM12ED	0.026	RPM22ED	0.036	RPM32ED	0.054	RPM42ED	0.071
--- 110	RPM12FD	0.026	RPM22FD	0.036	RPM32FD	0.054	RPM42FD	0.071

~ 24	RPM12B7	0.026	RPM22B7	0.036	RPM32B7	0.054	RPM42B7	0.071
~ 48	RPM12E7	0.026	RPM22E7	0.036	RPM32E7	0.054	RPM42E7	0.071
~ 120	RPM12F7	0.026	RPM22F7	0.036	RPM32F7	0.054	RPM42F7	0.071
~ 230	RPM12P7	0.026	RPM22P7	0.036	RPM32P7	0.054	RPM42P7	0.071



RPZF2 + relay RPM22F7



RUW24...



RPZ1DA



RPZ3FA

Sockets					
Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Screw clamp terminals	RPM1...	10	RPZF1	0.042
		RPM2...	10	RPZF2	0.054
		RPM3...	10	RPZF3	0.072
		RPM4...	10	RPZF4	0.094

Protection modules					
Description	Voltage	Socket type	Sold in lots of	Catalog number	Weight kg
V					
Diode	--- 6...250	RPZF1RPZ F2	20	RXM040W	0.003
		RPZF3 RPZF4	10	RUW240BD	0.004
		RPZF1RPZ F2	20	RXM041BN7	0.010
RC circuit	~ 24...60	RPZF1RPZ F2	20	RXM041FU7	0.010
	~ 110...240	RPZF1RPZ F2	20	RXM041FU7	0.010
		RPZF3 RPZF4	10	RUW241P7	0.004
Varistor	~/- 6...24	RPZF1RPZ F2	20	RXM021RB	0.030
	~/- 24...60	RPZF1RPZ F2	20	RXM021BN	0.030
	~/- 110...240	RPZF1RPZ F2	20	RXM021FP	0.030
	~/- 24	RPZF3 RPZF4	10	RUW242B7	0.004
	~/- 240	RPZF3 RPZF4	10	RUW242P7	0.004

Timer module (1)					
Description	Voltage	Socket type		Catalog number	Weight kg
V					
Multifunction	~/- 24... 240	RPZF3 RPZF4		RUW101MW	0.020

Accessories				
Description	For use with	Sold in lots of	Catalog number	Weight kg
Metal hold-down clip (for single-pole relays)	RPZF1	20	RPZR235	0.001
Mounting adapters for DIN rail (2)	RPM1●●●	20	RPZ1DA	0.004
	RPM2●●●	20	RXZE2DA	0.004
	RPM3●●●	20	RPZ3DA	0.004
	RPM4●●●	20	RPZ4DA	0.006
Mounting adapters with fixing lugs for panel	RPM1●●●	20	RPZ1FA	0.002
	RPM2●●●	20	RXZE2FA	0.002
	RPM3●●●	20	RPZ3FA	0.003
	RPM4●●●	20	RPZ4FA	0.004
Clip-in ID tags (sheet of 108 ID tags)	All relays	10	RXZL520	0.080


(1) See timer module description (selection of functions and time delays) on page 41

(2) Test button becomes inaccessible.

Dimensions (mm):

Power relays

RPM 1

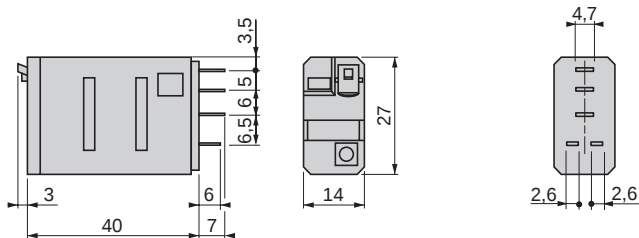


Common side view

RPM2

RPM 3


RPM 4

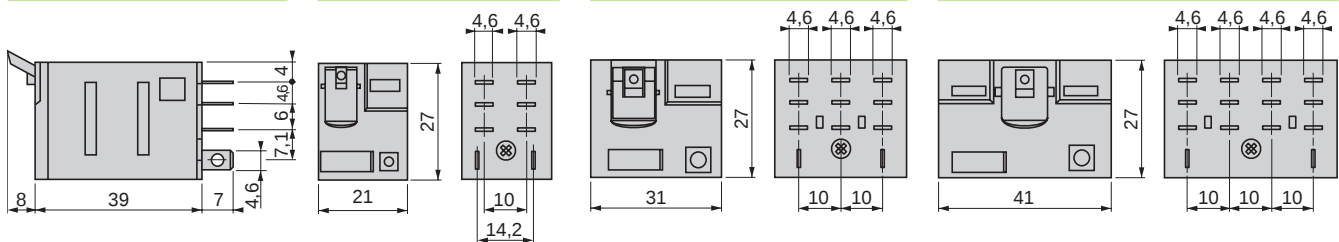

Sockets

RPZF1


RPZF2

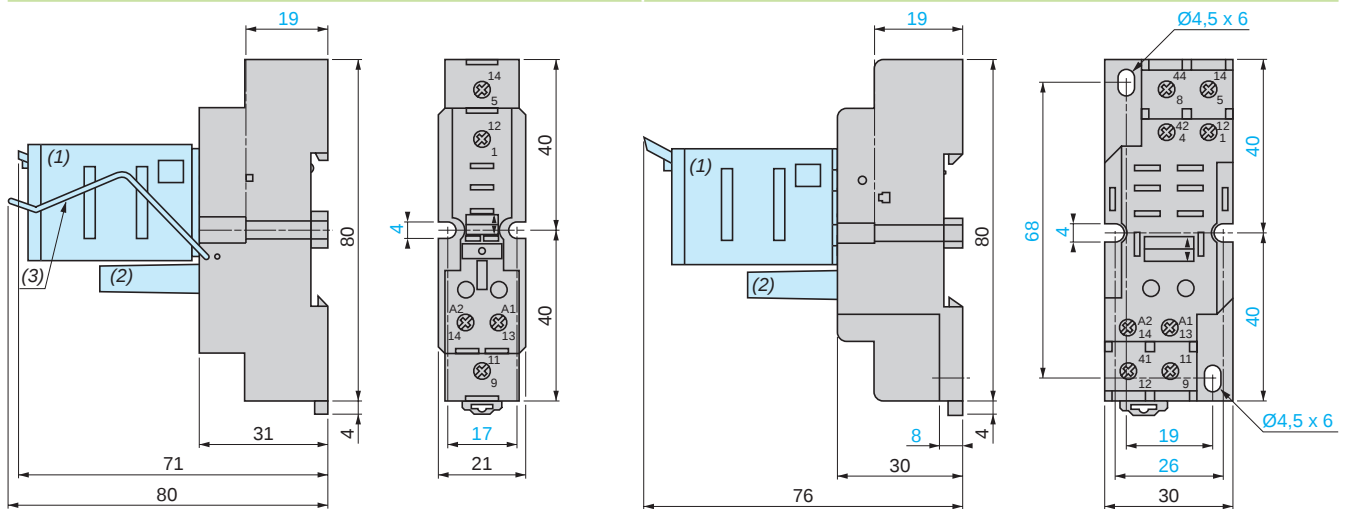

Common side view

RPZF3

RPZF4

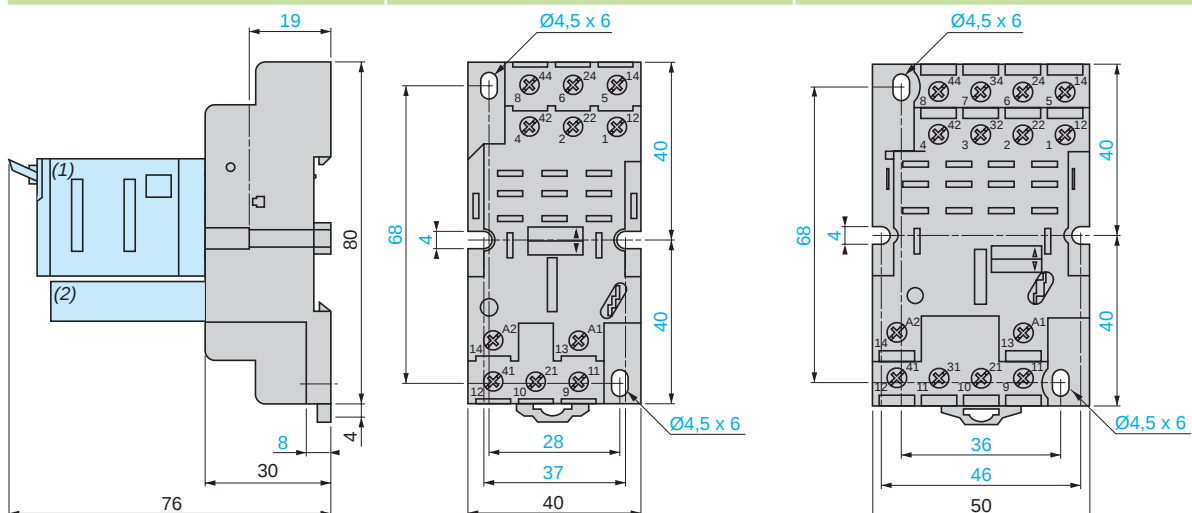


- (1) Relays
- (2) Protection module
- (3) Retention clip


Dimensions (mm):

Mounting adapters for DIN rail


RPZ1DA




RXZE2DA



RPZ3DA




RPZ4DA

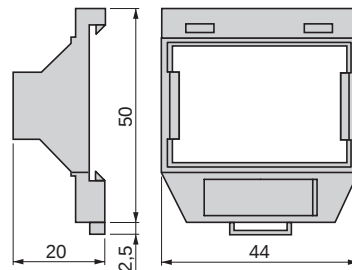


Mounting adapters with fixing lugs for panel


RPZ1FA




RXZE2FA



RPZ3FA






RPZ4FA

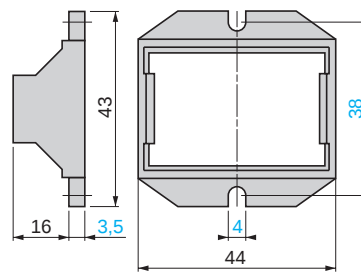

Mounting


Mounting adapters for DIN rail (1)



(1) Test button becomes inaccessible


Wiring diagrams

Power relays

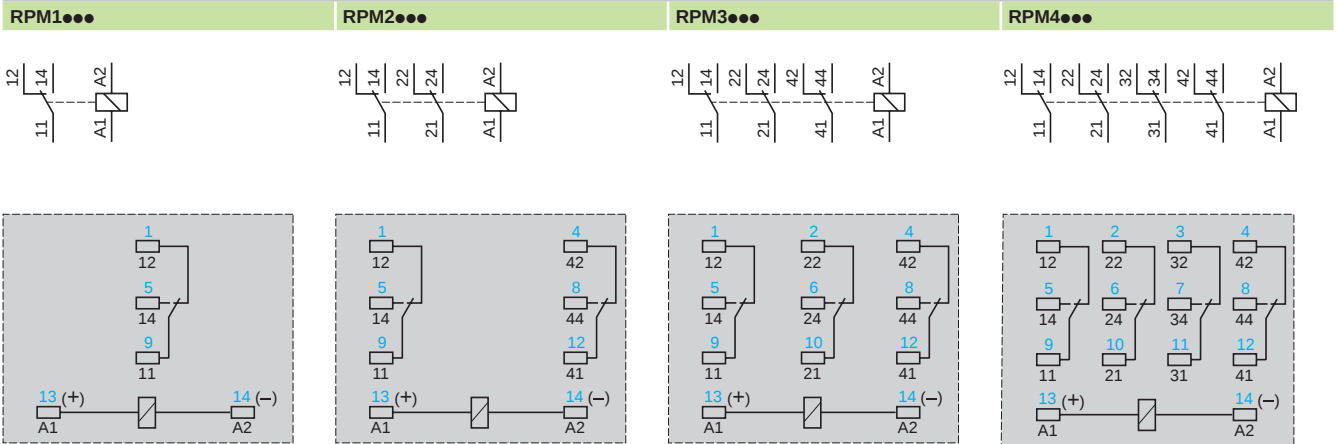


Symbols shown in blue correspond to Nema marking.

Sockets

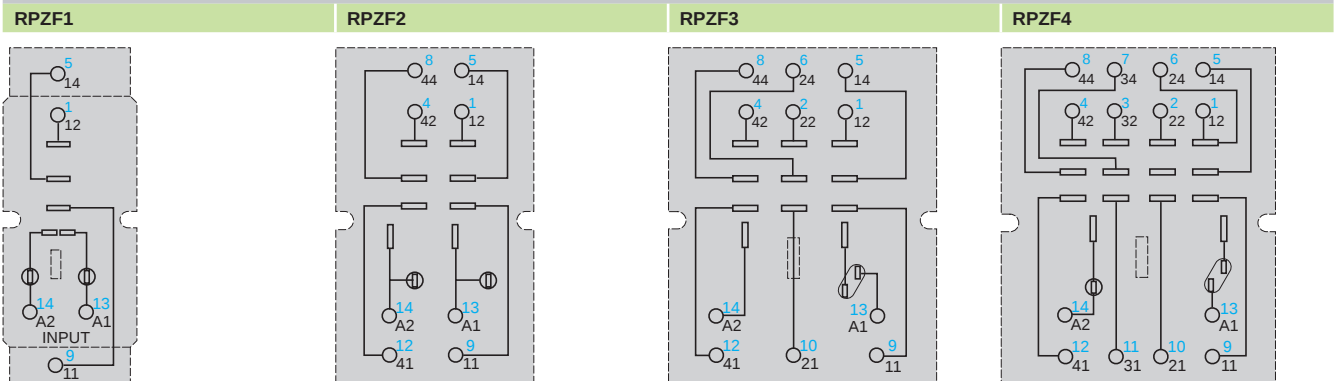


Symbols shown in blue correspond to Nema marking.

Protection modules

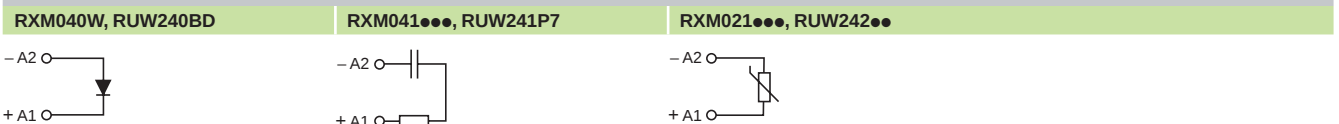

Introduction of the product range

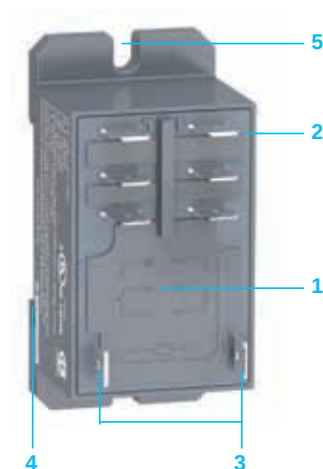

- 1 30 A relays with 2 C/O or 2 N/O contacts
- 2 Four or six quick-connect terminals
- 3 Two relay coil terminals
- 4 A locating slot for DIN rail mounting
- 5 Two holes for optional panel mounting

General specifications


Conformity to standards			IEC/EN 61810-1, UL 508, CSA C22-2 n°14
Product certifications and standards			UL listed, CSA, CE, GOST, RoHS
Ambient air temperature around the device	Storage	°C (°F)	- 40 to + 85 (-40 to +185)
	Operation	°C (°F)	- 40 to + 55 (-40 to + 131)
Vibration resistance conforming to EC/EN 60068-2-6	In operation		3 gn (+/- 1 mm, 10 to 150 Hz) 5 cycles
	Not in operation		10 gn (+/- 1 mm, 10 to 150 Hz) 5 cycles
Degree of protection	Conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	In operation		10 gn
	Not in operation		30 gn
Protection category			RT II
Polution degree			3
Mounting position			Any

Insulation specifications

Rated insulation voltage (Ui)		V	250 (conforming to IEC)
		V	300 (conforming to UL)
Rated impulse withstand voltage (Uimp)		kV	4 (1.2 µs / 50 µs)
Dielectric strength (rms voltage)	Between coil and contact	Vac	4000 (reinforced insulation)
	Between poles	Vac	2000 (basic insulation)
	Between contacts	Vac	1500 (micro-disconnection)

Contact specifications				
Relay type			RPF 2A●●	RPF 2B●●
Number and type of contacts			2 N/O	2 C/O
Contact materials			AgSnO ₂	
Conventional thermal current (I _{th})	For ambient temperature ≤ 40°C		30 A at 28 Vdc / 250 Vac (when mounted with 13 mm gap between two relays) 25 A at 28 Vdc / 250 Vac (when mounted side by side without a gap)	
Rated operational current	Conforming to IEC	N.O.	30 A at 250 Vac; 30 A at 28 Vdc	
		N.C.	3 A at 250 Vac; 3 A at 28 Vdc	
	Conforming to UL	N.O.	General Use: 30 A at 277 Vac Resistive: 20 A at 28 Vdc Motor: 1.0 hp at 120 Vac; 3.0 hp at 240 Vac LRA/FLA : 96 A / 22 A @ 240 Vac (AC coil), 30,000 cycles 10 A / 25.3 A @ 240 Vac (DC coil), 30,000 cycles Pilot Duty: 720 VA / A 300, 6000 cycles Short Circuit: 5000 A rms @ 3 hp, 240 Vac Tungsten: 10 A at 120 Vac 50/60 Hz, 25,000 cycles 6 A at 250 Vac 50/60 Hz, 25000 cycles	
		N.C.	Resistive: 3 A at 277 Vac (6000 cycles); 3 A at 28 Vdc	
Minimum switching current			10 mA	
Minimum switching voltage			17 V	
Maximum switching voltage			250 Vac / Vdc (conforming to IEC)	
Switching capacity	Maximum		7500 VA / 840 W (when mounted with 13 mm gap between two relays) 6250 VA / 700 W (when mounted side by side without a gap)	
	Minimum		170 mW	
Maximum operating rate	No load		18,000 cycles per hour	
	Under load		1200 cycles per hour	
Utilization coefficient			10 %	
Mechanical durability			50,000,000 cycles	
Electrical durability	Resistive load		100,000 cycles, unless otherwise specified under rated operational current	
	Inductive load		See curves below	

Electrical durability of contacts

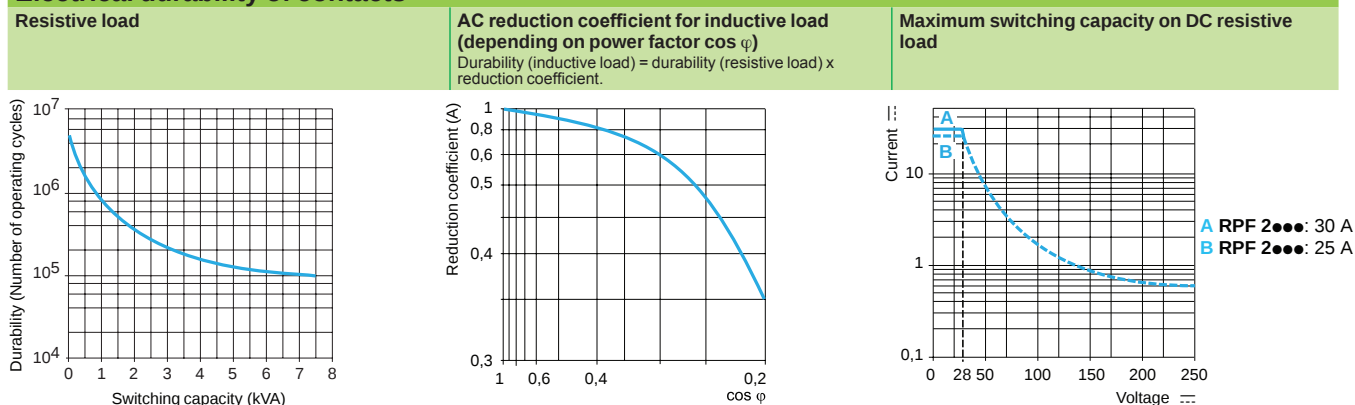

Note: These curves are for reference only and are typical values only. Actual performance is dependant upon the actual load, environment, duty cycle, and other conditions specific to the application.

Coil specifications

Average consumption		VA	4				
		W	1.7				
Drop-out voltage threshold		Vac	≥ 0.15 Uc				
		Vdc	≥ 0.1 Uc				
Operating time (response time)	Between coil energization and making of the On-delay contact	ms	25 (max.)				
	Between coil de-energization and making of the Off-delay contact	ms	25 (max.)				
Control circuit voltage Uc		V	12	24	110	120	230
Relay control voltage codes			JD	BD	FD	—	—
DC supply	Average resistance at 20 °C ± 10%	Ω	86	350	7255	—	—
	Operating voltage limits	Min. Vdc	9.6	19.2	88	—	—
		Max. Vdc	13.2	26.4	121	—	—
Relay control voltage codes			—	B7	—	F7	P7
AC supply	Average resistance at 20 °C ± 15%	Ω	—	170	—	4250	15,600
	Operating voltage limits	Min. Vac	—	19.2	—	96	184
		Max. Vac	—	26.4	—	132	253
Contractual warranty period			18 months				

Zelio™ Plug-In Relays

RPF power relays




Power relays (sold in lots of 10)			
Control circuit voltage (V)	Number and type of contacts – Thermal current (Ith)		Weight kg (lbs)
	2 N/O - 30 A (1)	2 C/O - 30 A (1)	
	Catalog number	Catalog number	
12 Vdc	RPF2AJD	RPF2BJD	0.082 (0.181)
24 Vdc	RPF2ABD	RPF2BBD	0.082 (0.181)
110 Vdc	RPF2AFD	RPF2BFD	0.082 (0.181)
24 Vac	RPF2AB7	RPF2BB7	0.082 (0.181)
120 Vac	RPF2AF7	RPF2BF7	0.082 (0.181)
230 Vac	RPF2AP7	RPF2BP7	0.082 (0.181)

(1) 30 A when mounted with 13 mm gap between two relays and 25 A when mounted side by side without a gap.


Dimensions: mm (inches)

Power relays

RPF 2A●●

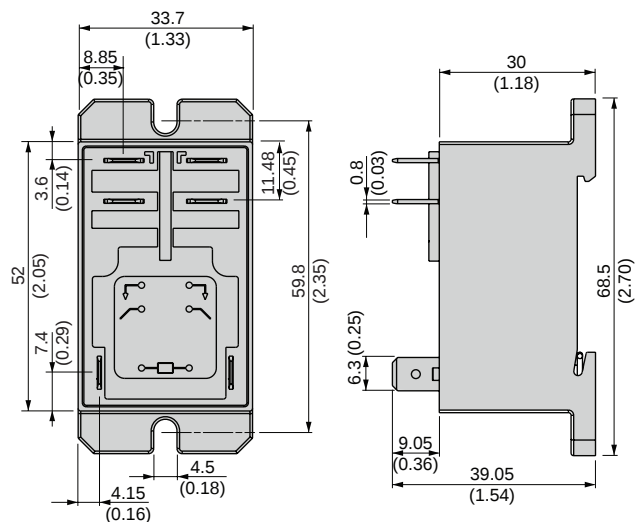


RPF 2B●●

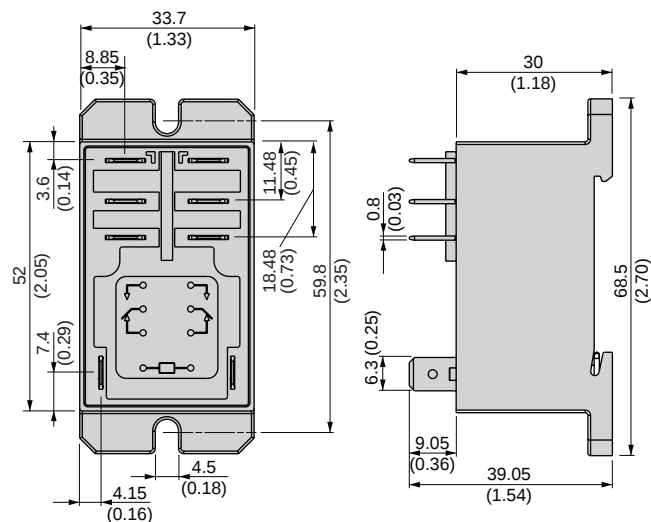


Wiring diagrams

Power relays

RPF 2A●●



RPF 2B●●



Symbols shown in blue correspond to NEMA marking; symbols shown in black correspond to IEC marking.

Applications	Electromechanical interface modules	
		
	Input	
	17.5	9.5
	1 N/O 2 N/O 1 C/O	1 N/O
	–	
Control voltages	$\overline{\sim}$ 110...127 V $\sim$ 24 V, 48 V $\sim$ 115...127 V $\sim$ 230/240 V	$\overline{\sim}$ 24 V, 48 V $\sim$ 115...127/50 Hz $\sim$ 115...127/60 Hz $\sim$ 230...240/50-60 Hz
Indication	Mechanical for contacts and/or LED for control	LED for control
Product numbers	ABR1E	ABR2E
Pages	56	62

Solid state interface modules



Output		Input and output Very low level switching	Input	Output
17.5	12	17.5	9.5	9.5/17.5
1 N/O 2 N/O 1 C/O 1 N/C + 1 N/O	1 N/O	1 C/O	–	
12 A	5 A	–		5 A
$\overline{\sim}$ 24 V $\sim$ 24 V, 48 V $\sim$ 115...127 V $\sim$ 110 V	$\overline{\sim}$ 24 V		$\overline{\sim}$ 5, 24, 48 V $\sim$ 115...127/50 Hz $\sim$ 120...127/60 Hz $\sim$ 230...240/50 Hz $\sim$ 230...240/60 Hz	$\overline{\sim}$ 24 V
Mechanical for contacts and/or LED for control	LED for control			
ABR1S	ABR2S	ABR2●B312B	ABS2E	ABS2S
56	62	62	68	

Interfaces

For discrete signals

Electromechanical interface modules

ABR-1 electromechanical interface modules are supplied in the form of compact modules, 17.5 mm wide.

They are designed for interfacing discrete digital control signals exchanged within an automated system between the processing unit (PLC, numerical controller, etc) and the other components (contactors, solenoid valves, indicator lamps, proximity sensors, etc).

These products are based on advanced contactor technology and are easily adapted to industrial environments. They conform to the most recent IEC 947-5-1 standards.

Composition

The ABR-1 range includes 2 families:


Input interfaces

Input interfaces are designed for switching input signals to the processor and are characterized by their advanced contact reliability: less than 1 interruption per 100 million operating cycles at $\approx 17\text{ V}, 5\text{ mA}$.

The switching level is sufficiently high to help ensure that the interfaces can directly control most contactors and indicator lamps.


Output interfaces

Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for signalling devices (indicators lamps, audible warnings, etc). They are characterized by a high switching capacity and an average durability 5 times greater than that of traditional interface modules, which incorporate standard relays.

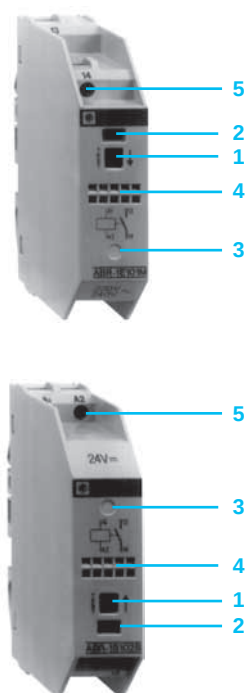

- 1 Override contacts by pressing button (not holding it down) for a simple and quick test during installation or maintenance operations on the installation
- 2 Green indicator showing the mechanical position of the contacts
- 3 LED indicating the control signal state
- 4 Channel identification : 5 individual characters for AB1-R/G or one AB1-SA2 marker tag
- 5 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal. The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.

Examples of applications with PLCs

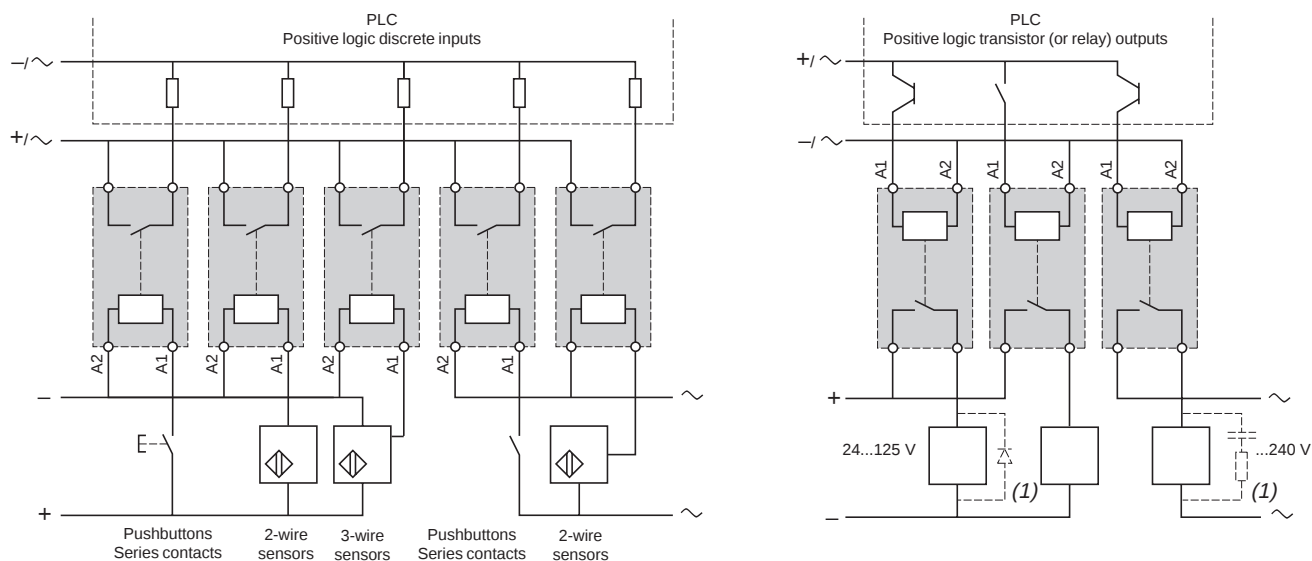

(1) Essential on inductive loads (can be replaced with peak limiter).

Environment

Conforming to standards				IEC 60947-1, UL 508, CSA C22.2 No. 14	
Product certifications				UL, CSA, BV, LROS, DNV	
Degree of protection	Conforming to IEC 529 (protection against direct contact)			IP 00	
Protective treatment				“TC”	
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C	850	
		Conforming to UL 94		V0	
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms		50 gn	
Vibration resistance	Conforming to IEC 68-2-6	10...55 Hz		6 gn	
Resistance to electrostatic charges	Conforming to IEC 801-2	Level 3	kV	8	
Resistance to rapid transients	Conforming to IEC 801-4	On power supply	kV	2	
		On I/O	kV	1	
Resistance to shock waves	Conforming to IEC 255-4	Waveform 1.2/50 ms ; 0.5 J	U ≤ 50 V	kV	0.5
			U > 50 V	kV	2.5
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm²	0.6...2.5	
	Flexible wire with cable end	1 or 2-wire	mm²	0.34...2.5	
	Rigid cable	1-wire	mm²	0.27...4	
		2-wire	mm²	0.27...2.5	
Operating position				Any	
Ambient air temperature around the device	Unrestricted operation		°C	- 5...+ 40	
	Permissible at Un		°C	- 20...+ 60	
	Storage		°C	- 40...+ 70	
Operating altitude			m	≤ 3000	
Installation category	Conforming to IEC 947-1			II	
Degree of pollution	Conforming to IEC 947-5-1			3	
Mounting				Standard DIN rails	


Control circuit characteristics (40°C ambient temperature)				
Type of interface		ABR 1S●02B	ABR 1●●●8B	ABR 1●●●8E
Rated voltage (U _c)	V	--- 24	~ 24	~ 48
Current frequency	Hz	—	50/60	50/60
Energization threshold (at ± 5 %)	V	15	16.5	34
Maximum operating voltage --- / ~	V	30	30	53
Maximum drop-out (at ± 5 %) voltage (U _o) --- / ~	V	3.2	3.8	8.5
Maximum current (I _u) --- / ~	mA	62	62/55	36/32
Minimum holding current --- / ~	mA	6.6	4.9/5.2	4.7/5.4
Maximum dissipated power 50 Hz/60 Hz	W	1.5	1.5	1.5
Disappearance of voltage maximum time up to which contact is maintained	ms	3	8	10
Display of control circuit by LED		No	Yes	Yes
Built-in protection reversed polarity		Yes	Yes	Yes
Contact characteristics				
Type of interface		ABR1E●●●●	ABR1S●●●●	
Maximum switching voltage ~ V		252	252	
--- V		125	125	
Maximum rated operating voltage U _e Conforming to IEC 947-5-1 ~ V		230	230	
--- V		125	125	
Operating current frequency	Hz	50/60	50/60	
Thermal current I _{th} Conforming to IEC 947-1	A	2	12	
Rated operating current (I _e) Conforming to IEC 947-5-1 U _e : ~ 230 V	AC12	A	2	4
per 1 million operating cycles	AC13	A	1	1
	AC14	A	1	1
	AC15	A	1	1
	DC12	A	2	5
	DC13	A	1	1
Minimum switching capacity	mA	3	3	
Minimum switching voltage	V	17	17	
Protection against short-circuits For I _k ≤ 2.5 kA (~) and ≤ 100 A (---) Type and value of recommended fuse	A	gG/gF : 16	gG/gF : 16	
Low power switching performance of contacts (17 V - 5 mA) Number of interruptions per "n" million operating cycles		10 ⁻⁸	10 ⁻⁸	
Other characteristics				
Operating time at U _n and at 20 °C	Between energization of coil and closing of N/O contact	ms	≤ 12	
	Between energization of coil and opening of N/C contact	ms	≤ 12	
	Between de-energization of coil and opening of N/O contact	ms	≤ 12	
	Between de-energization of coil and closing of N/C contact	ms	≤ 12	
Duration of bounce		ms	≤ 3	
Contact bridging times between contact "N/C" and "N/O"	Maximum make before break or break before make time	ms	1	
Maximum operating rate At no-load		Hz	6	
At I _e		Hz	0.5	
Mechanical durability in millions of operating cycles	ABR-1 (1 N/O or 2 N/O)		≥ 20 million	
	ABR-1 (1 C/O or 1 N/C + 1 N/O)		≥ 10 million	
Rated isolation voltage Conforming to IEC 947-1		V	250	
Conforming to VDE 0110 group C		V	250	
Insulation test voltage for 1 min. Between coil circuit and contact circuits		kV	4	
	Between wired interface and ground	kV	2.5	
	Between independent contacts	kV	1.5	

Electrical durability of contacts

Test conditions : in accordance with standard IEC 947-5-1 set up for rated control voltage, operating rate : 1800 cycles/hour. (0.5 Hz).


a.c. loads

Operating cycles in millions

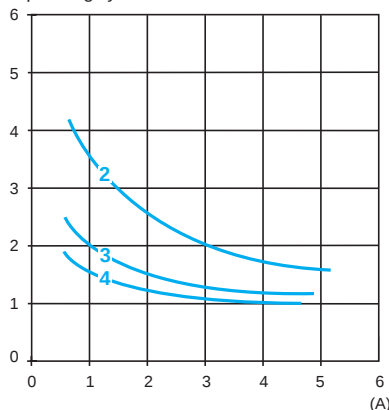


AC-12 : control of resistive loads and isolated solid state loads via optocoupler
 $\cos \varphi \geq 0.9$

Operating cycles in millions

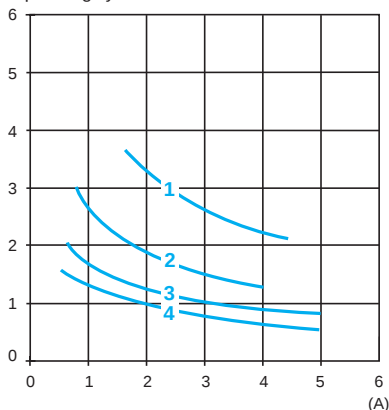

AC-13 : control of isolated solid state loads via transformer
 $\cos \varphi \geq 0.65$

Operating cycles in millions

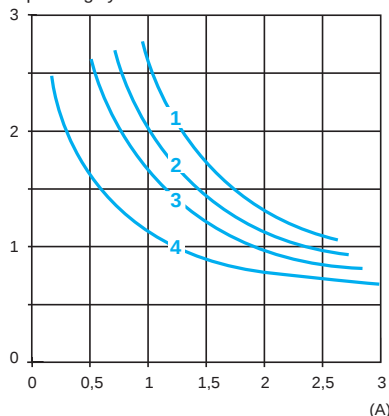


AC-14 : control of weak electromagnetic loads of electromagnets $\leq 72 \text{ VA}$
 make: $\cos \varphi = 0.3$
 break: $\cos \varphi = 0.3$
 AC-15 : control of electromagnetic loads of electromagnets $> 72 \text{ VA}$
 make: $\cos \varphi = 0.7$
 break: $\cos \varphi = 0.4$

1 24 V
 2 48 V
 3 127 V
 4 230 V


d.c. loads

Operating cycles in millions

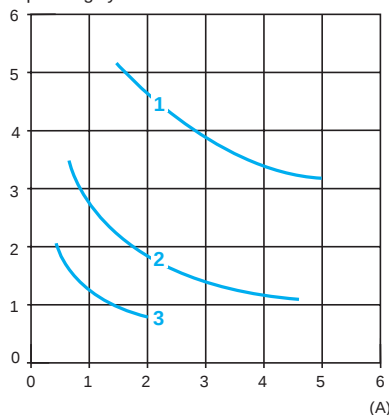

DC-12 : control of resistive loads and isolated solid state loads via optocoupler
 $L/R \leq 1 \text{ ms}$

Operating cycles in millions

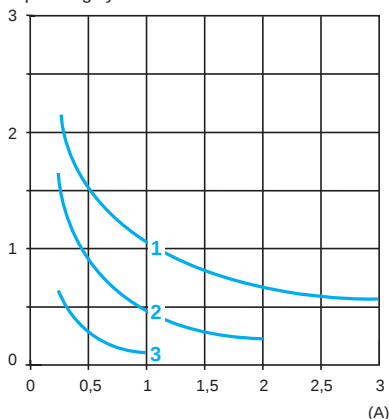

DC-13 : control of electromagnetic loads
 $L/R \leq 2 \times (U_e \times I_e) \text{ in ms.}$
 U_e : rated operating voltage
 I_e : rated operating current

1 24 V
 2 48 V
 3 127 V

Interfaces

For discrete signals

Electromechanical interface modules

Control circuit: a.c. or d.c.



ABR1E101M



ABR1E318B



ABR1S102B



ABFC08R...

Input interface modules (1) (17.5 mm pitch)

Display	Contact Configuration	Control circuit	Catalog number	Weight
		V		kg
Mechanical (2)	1 N/O	~ 230/240	ABR1E101M	0.090
	1 C/O	~ 230/240	ABR1E301M	0.090
Mechanical (2) + LED (3)	1 N/O	~ 24	ABR1E118B	0.095
		~ 48	ABR1E118E	0.095
		--- 110...127 (4)	ABR1E112F	0.095
		~ 115...127	ABR1E111F	0.095
		~ 230/240	ABR1E111M	0.095
	2 N/O	~ 24	ABR1E418B	0.095
		~ 48	ABR1E418E	0.095
		--- 110...127(4)	ABR1E412F	0.095
		~ 115...127	ABR1E411F	0.095
		~ 230/240	ABR1E411M	0.095
	1 C/O	~ 24	ABR1E318B	0.095
		~ 48	ABR1E318E	0.095
		--- 110...127(4)	ABR1E312F	0.095
		~ 115...127	ABR1E311F	0.095
		~ 230/240	ABR1E311M	0.095

Output terminals-relays (1) (17.5 mm pitch)

Display	Contact Configuration	Control circuit	Catalog number	Weight
		V		kg
Mechanical (2)	1 N/O	--- 24	ABR1S102B	0.090
	2 N/O	--- 24	ABR1S402B	0.090
	1 C/O	--- 24	ABR1S302B	0.090
	1 N/C + 1 N/O	--- 24	ABR1S602B	0.090
Mechanical (2) + LED (3)	1 N/O	~ 24	ABR1S118B	0.095
		~ 48	ABR1S118E	0.095
		~ 115...127	ABR1S111F	0.095
	2 N/O	~ 24	ABR1S418B	0.095
		~ 48	ABR1S418E	0.095
		~ 110	ABR1S411F	0.095
	1 C/O	~ 24	ABR1S318B	0.095
		~ 48	ABR1S318E	0.095
		~ 110	ABR1S311F	0.095
	1 N/C + 1 N/O	~ 24	ABR1S618B	0.095
		~ 48	ABR1S618E	0.095
		~ 110	ABR1S611F	0.095

Commoning links

Description	For common	Color	Distance between wire ends	Catalog number	Weight
			cm		kg
Commoning links in modules 8 x 1 mm ²	Coil	White	12	ABFC08R12W	0.020
			2	ABFC08R02W	0.010
	~	Red	12	ABFC08R12R	0.020
			2	ABFC08R02R	0.010
	---	Blue	12	ABFC08R12B	0.020
			2	ABFC08R02B	0.010

(1) Connection by screw-clamp.


(2) By green mechanical indicator light for contact(s) activated electrically or mechanically by pressing the test button.

(3) By green LED illuminated when control signal is present.


(4) With polarization (+ on A1, - on A2).

Dimensions (mm):

ABR 1E

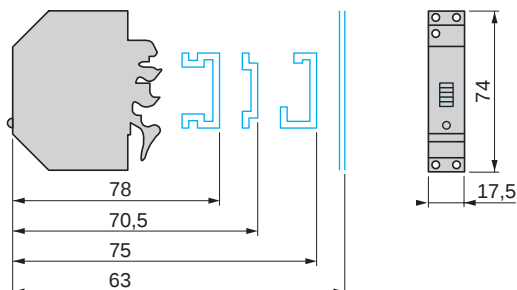


ABR 1S

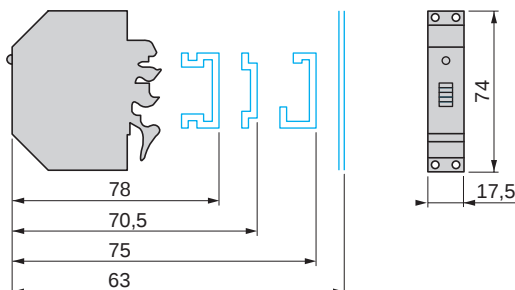


Wiring diagrams

--- 24 V or ~ 230 V interfaces with mechanical indication


1 N/O




1 C/O



2 N/O




1 N/C + 1 N/O




~ 24 V or ~ 48 V interfaces with mechanical indication + LED


1 N/O




1 C/O



2 N/O




1 N/C + 1 N/O




--- / ~ 110 V or ~ 230 V interfaces with mechanical indication + LED


1 N/O




1 C/O



2 N/O




1 N/C + 1 N/O



Interfaces

For discrete signals

Slim electromechanical interface modules

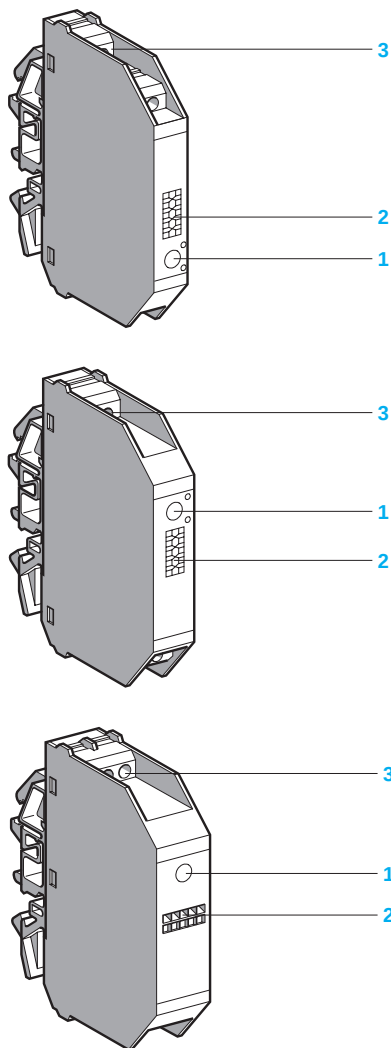

ABR-2 electromechanical interface modules complement the ABR-1 range.

They are characterized by micro relay technology which allows reduced dimensions and very low switching levels (TTL, HCMOS, analog signals).

The ABR-2 family is in the form of slim compact modules, 9.5 mm wide for input interface modules, 12 mm wide for output interface modules and 17.5 mm wide for very low level switching products.

Description

The ABR-2 includes 3 families:

Input interfaces (9.5 mm pitch)

Input interfaces are designed for switching input signals to a processor and are characterized by their advanced contact reliability: less than 1 interruption per 100 million operating cycles at $\pm 17\text{ V}$, 5 mA.

They have increased immunity to current leakages $\leq 2\text{ mA}$, and a wide coil voltage range (0.7 to 1.25 Un).

Output interfaces (12 mm pitch)

Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for signalling devices (indicators lamps, audible warnings etc). They are characterized by a high switching capacity and an advanced immunity to current leakages $\leq 2\text{ mA}$. A lower cost version without LED signalling is available.

Low level switching input and output interfaces (17.5 mm pitch) with 1 C/O contact.


These interfaces are designed for switching logic (TTL or HCMOS) and analog signals.

Warning: never switch inductive loads with this type of interface.


The front panel of the ABR-2 electromechanical interface module includes:

- 1 LED indicating the control signal state
- 2 Channel identification : 5 individual characters for AB1-R/G or 1 AB1-SA2 marker tag
- 3 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal. The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.

Examples of applications with PLCs

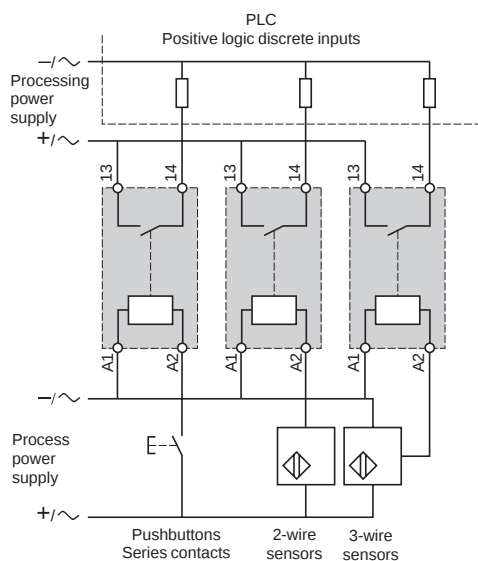

ABR2E●●●●

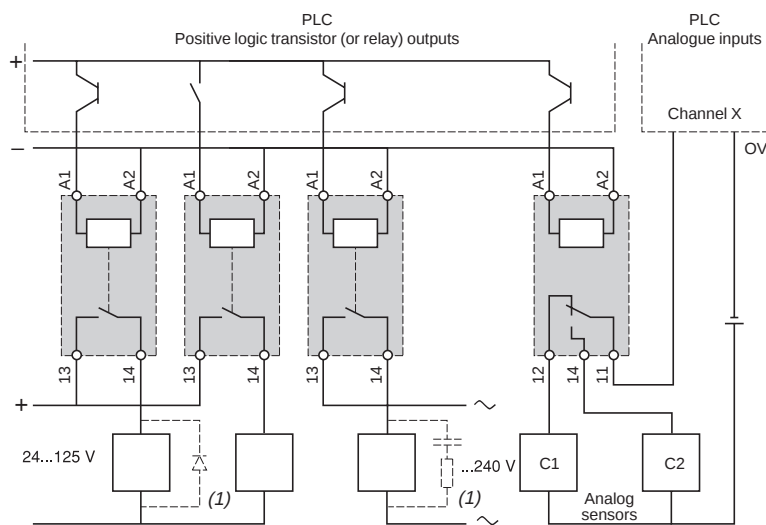

ABR2S●●●●

ABR2SB12B

(1) Essential on inductive loads (can be replaced with peak limiter).

Environment

Conforming to standards		IEC 60947-1, UL 508, CSA C22.2 No. 14	
Product certifications		UL, CSA, BV, LROS, DNV	
Degree of protection	Conforming to IEC 529 (protection against direct contact)	IP 20	
Protective treatment		"TC"	
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C 960
		Conforming to UL 94	V0
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms	30 gn
Vibration resistance	Conforming to IEC 68-2-6	10...150 Hz	3 gn
Resistance to electrostatic discharges	Conforming to IEC 801-2	Level 3	kV 8
Resistance to electromagnetic fields	Conforming to IEC 801-3	Level 3 ; 27...1000 MHz	V/m 10
Resistance to rapid transients	Conforming to IEC 801-4 Level 3	On power supply	kV 2
		On I/O	kV 1
Resistance to shock waves	Conforming to IEC 947-1	Waveform 1.2/50 µs ; 0.5 J	U < 50 V kV 0.5
			U < 150 V kV 1.5
			U < 300 V kV 2.5
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm² 0.6...2.5
	Flexible wire with cable end	1 or 2-wire	mm² 0.34...2.5
	Rigid cable	1-wire	mm² 0.27...4
Operating position		Any	
Ambient air temperature	Unrestricted operation	°C	- 5...+ 40
	Operation from 0.85...1.1 Us (assigned voltage)	°C	- 5...+ 55
	Operation restricted to Us (assigned voltage)	°C	- 25...+ 70 (2)
	Storage	°C	- 40...+ 80
Operating altitude		m	≤ 3000
Installation category	Conforming to IEC 947-1		II
Degree of pollution	Conforming to IEC 947-1		2
Mounting		Standard DIN rails	

(2) Leave space of 8 mm between ABR-2S1●●● for an ambient temperature ≥ 55 °C

Control circuit characteristics (40°C ambient temperature)										
Type of interface		ABR 2E112B	ABR 2E112E	ABR 2E115F	ABR 2E116F	ABR 2E111M	ABR 2S112B	ABR 2S102B	ABR 2●B312B (1)	
Rated voltage (Us)	V	~ 24	~ 48	~ 115...127	~ 120...127	~ 230...240	~ 24	~ 24	~ 24	
Current frequency	Hz	–	–	50	60	50/60	–	–	–	
Energization threshold	V	16.9	37.3	93	97	186	16.9	14.5	16.9	
Maximum operating voltage	V	28.8	57.6	140	140	264	28.8	28.8	28.8	
Maximum drop-out voltage (Uo)	V	3.8	8.5	25.4	25.4	48	3.8	2	3.8	
Maximum current (at Us)	mA	19.5	11	14	16	15	28	18	23	
Minimum holding current	mA	2	2	2.5	2.5	2.5	2	1.3	2	
Maximum dissipated power (at Us)	50 Hz	W	–	0.66	–	0.54	–	–	–	
	60 Hz	W	0.45	0.52	–	0.73	0.77	0.64	0.55	
Disappearance of voltage maximum time up to which contact is maintained	ms	1	1	10	10	10	1	5	1	
Display of control circuit by LED		Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
Built-in protection reversed polarity		Yes	Yes	–	–	–	Yes	Yes	Yes	
Contact characteristics (40°C ambient temperature)										
Type of interface		ABR2E●●●●		ABR2S112B		ABR2S102B		ABR2●B312B (1)		
Contact configuration		1 N/O		1 N/O		1 N/O		1 C/O		
Maximum rated operating voltage (Ue max)	Conforming to IEC 947-5-1	~ V	127	230		230		48		
		~ V	100	120		120		48		
Maximum switching voltage		~ V	140	250		250		60		
		~ V	125	150		150		60		
Operating current frequency	Hz	50/60		50/60		50/60		50/60		
Thermal current Ith	Conforming to IEC 947-1	A	1	5		5		0.05		
Rated operating current (Ie) for 1 million operating cycles	Conforming to IEC 947-5-1	A	1	3		3		–		
	Ue max	AC12	A	0.5	1		1		–	
		AC14	A	0.5	1		1		–	
		AC15	A	0.5	1		1		–	
	Conforming to IEC 947-5-1	DC12	A	1	1.7		1.7		–	
	Ue : ~ 24 V	DC13	A	1	1.5		1.5		–	
Minimum switching current		mA	1	5		5		0.01		
Minimum switching voltage		V	5	5		5		0.01		
Protection against short-circuits	For Ik ≤ 1 kA (˘) and ≤ 100 A (˘˘)	A	Type : quick-blow fuse with high breaking capacity							
	Type and value of recommended fuse		2		6.3		6.3		0.4	
Low level contact performance (17 V, 5 mA)/ ABR-2●B (30 mV, 10 µA)	Number of interruptions per "n" million operating cycles		1 per 100 million							
Other characteristics										
Maximum operating time at Us (bounce included)	Between energization of coil and closing of N/O contact	˘˘	ms	10	10		10		6	
		˘	ms	30	–		–		–	
	Between energization of coil and opening of N/C contact		ms	–	–		–		6	
	Between de-energization of coil and opening of N/O contact	˘˘	ms	6	12		5		6	
		˘	ms	30	–		–		–	
	Between de-energization of coil and closing of N/C contact		ms	–	–		–		6	
Maximum duration of bounce		ms	5	5		5		2		
No make before break guaranteed between "N/C" and "N/O" contacts	Maximum make before break	On energization	ms	–	–		–		5	
	On de-energization before make time		ms	–	–		–		2	
Maximum operating rate	At no-load	Hz	10	10		10		10		
	At Ie	Hz	0.5	0.5		0.5		–		
Mechanical durability in millions of operating cycles			20	10		10		20		
Rated insulation voltage	Conforming to IEC 947-1	V	300	300		300		300		
	Conforming to VDE 0110 group C	V	250	250		250		250		
Insulation test voltage for 1 min	Coil circuit/contact circuits	kV rms	2	4		4		1.5		
	Wired interface/ground	kV rms	2.5	2.5		2.5		2.5		
	Between open contacts	kV rms	0.75	1		1		1		


(1) Do not switch inductive loads.

Electrical durability of contacts (ABR 2S)

Test conditions : in accordance with standard IEC 947-5-1 set up for rated control voltage.


a.c. loads

Operating cycles in millions

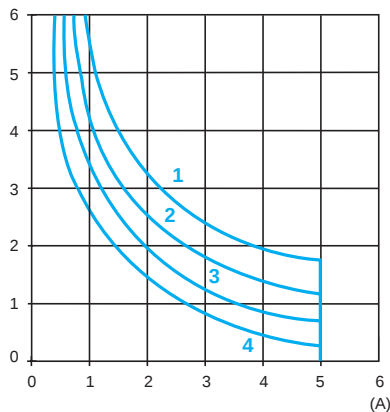

AC12 : control of resistive loads and isolated solid state loads via optocoupler
 $\cos \varphi \geq 0.9$

Operating cycles in millions

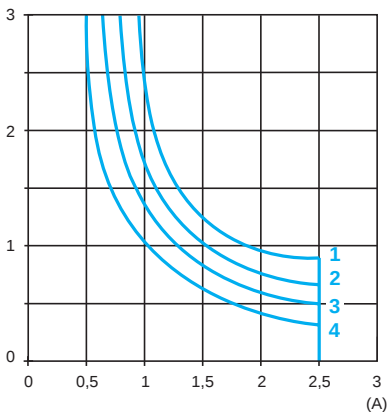


AC14 : control of weak electro-magnetic loads of electro-magnets $\leq 72 \text{ VA}$
 make : $\cos \varphi = 0.3$
 break : $\cos \varphi = 0.3$
 AC15 : control of electro-magnetic loads of electro-magnets $> 72 \text{ VA}$
 make : $\cos \varphi = 0.7$
 break : $\cos \varphi = 0.4$

1 24 V
 2 48 V
 3 115 V
 4 230 V


d.c. loads

Operating cycles in millions

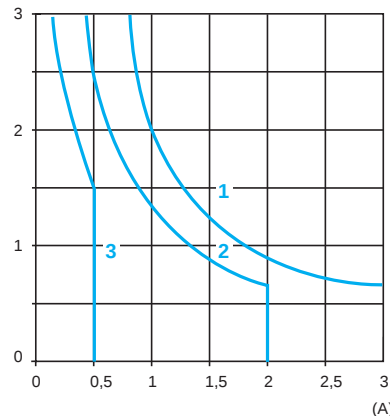

DC12 : control of resistive loads and isolated solid state loads via optocoupler
 $L/R \leq 1 \text{ ms}$

Operating cycles in millions

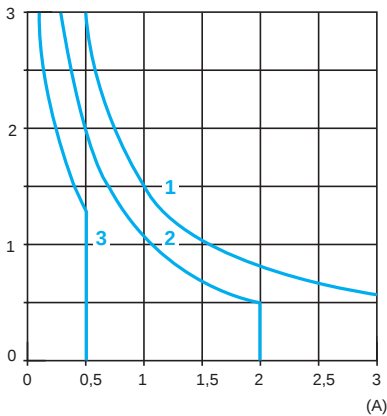

DC13 : control of electro-magnets
 $L/R \leq 2 \times (U_e \times I_e) \text{ in ms.}$
 U_e : rated operating voltage
 I_e : rated operating current
 (with a load protection diode)


1 24 V
 2 48 V
 3 115 V

Interfaces


For discrete signals

Slim electromechanical interface modules


Control circuit: a.c. or d.c.




ABR2E112B



ABR2S112B



ABR2EB112B



ABFC08R...

Input modules (9.5 mm pitch)

Indication	Contact Configuration	Control circuit	Sold in lots of	Catalog number	Weight
		V			kg
With LED	1 N/O	— 24	5	ABR2E112B	0.032
		— 48	5	ABR2E112E	0.032
		~ 115...127 (50 Hz)	5	ABR2E115F	0.035
		~ 120...127 (60 Hz)	5	ABR2E116F	0.035
		~ 230...240 (50/60 Hz)	5	ABR2E111M	0.036

Output modules (12 mm pitch)

Indication	Contact Configuration	Control circuit	Sold in lots of	Catalog number	Weight
		V			kg
Without	1 N/O	— 24	5	ABR2S102B	0.040
With LED	1 N/O	— 24	5	ABR2S112B	0.041

Modules for very low level switching (17.5 mm pitch)

Indication	Contact Configuration	Control circuit	Catalog number	Weight
		V		kg
Input				
With LED	1 C/O (1)	— 24	ABR2EB312B	0.048
Output				
With LED	1 C/O (1)	— 24	ABR2SB312B	0.048



Flexible comb accessories

Description	For common	Color	Distance between wire ends	Catalog number	Weight
			cm		kg
Flexible comb modularity 8 x 1 mm ²	Coil	White	12	ABFC08R12W	0.020
			2	ABFC08R02W	0.010
	~	Red	12	ABFC08R12R	0.020
			2	ABFC08R02R	0.010
	—	Blue	12	ABFC08R12B	0.020
			2	ABFC08R02B	0.010



(1) Not for use with inductive loads.

Dimensions (mm):



ABR2E11●●





ABR2S1●2B



ABR2EB312B

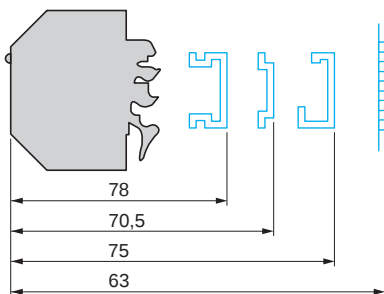


ABR2SB312B

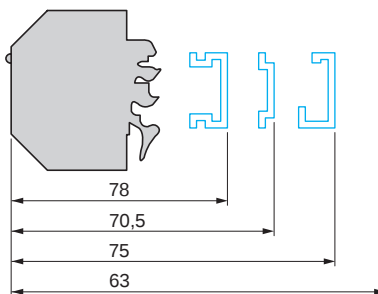


Circuit diagrams


ABR2E112B ($\approx$ 24 V)




ABR2E112E ($\approx$ 48 V)




ABR2E11●F/M ($\sim$ 115...240 V)




ABR2S102B ($\approx$ 24 V)



ABR2S112B ($\approx$ 24 V)



ABR2●B312B ($\approx$ 24 V)



Interfaces

For discrete signals

Slim solid-state interface modules

The ABS-2 solid-state interface relays are supplied in the form of compact modules which appear identical to the ABR-2 electromechanical family. They are designed for interfacing discrete digital control signals exchanged within an automated system between the processor (PLC, numerical controller, etc) and the other components (contactors, solenoid valves, indicator lamps, proximity sensors). They are suitable for use in equipment which requires the benefits of electronic technology: a high operating rate, enhanced durability, silent operation. These products are notable for their high performance and excellent adaptation to industrial environments. They also conform to the most recent IEC standards.

Composition

The ABS-2 range includes 2 families:

Input interfaces

The 9.5 mm wide input interfaces are designed for switching input signals to processors. They offer a wide choice of electrical isolation between signals due to the wide range of input voltages from ~ 5 V to ~ 230 V.

Output interfaces


Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for the signalling devices (indicator lamps, audible warnings, etc). Two widths are available, 9.5 and 17.5 mm, depending on the switched current.

The 17.5 mm version includes a 9.5 mm interface and an integrated 8 mm spacer. This device can, with its increased ventilation, switch high levels of currents.

The front panel of the ABS-2 slim solid-state interface modules includes:


- 1 LED indicating the state of the control signal.
- 2 Channel identification : 5 individual characters for AB1-/G or one AB1-SA2 marker tag.
- 3 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal.
- 4 Integrated spacer.

The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.

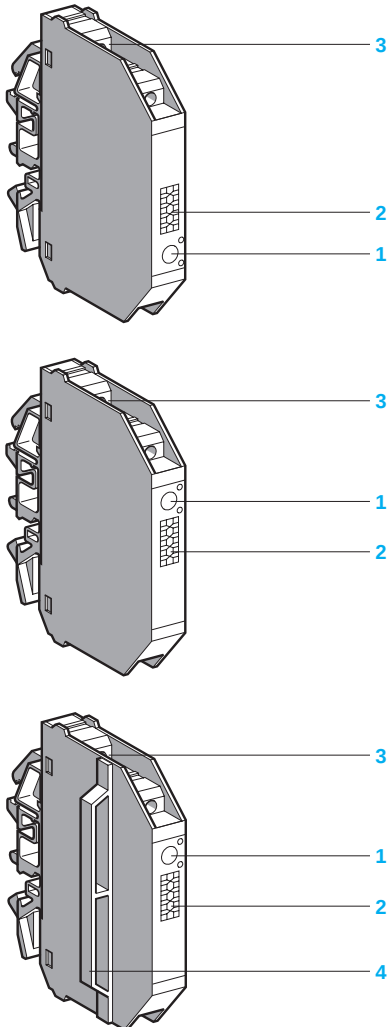


Examples of applications with PLCs

Interfacing PLC discrete inputs

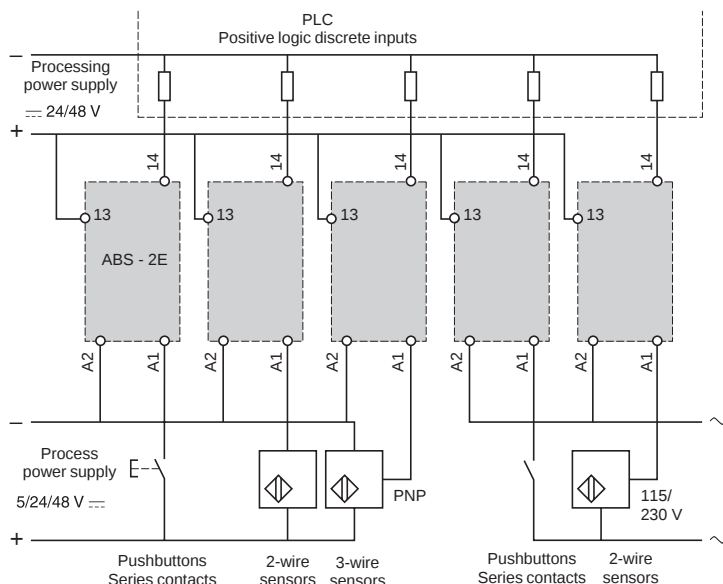

Interfacing PLC discrete outputs

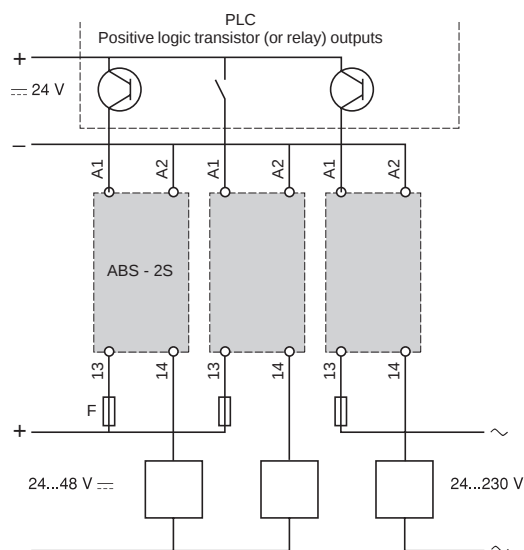

Environment

Conforming to standards				IEC 60947-1, UL 508, CSA C22.2 No. 14	
Product certifications				UL, CSA, BV, LROS, DNV	
Degree of protection	Conforming to IEC 529 (protection against direct contact)			IP 20	
Protective treatment				“TC”	
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C	960	
		Conforming to UL 94		V0	
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms		30 gn	
Vibration resistance	Conforming to IEC 68-2-6	10...150 Hz		5 gn	
Resistance to electrostatic discharges	Conforming to IEC 801-2	Level 3	kV	8	
Resistance to electromagnetic fields	Conforming to IEC 801-3	Level 3 ; 27...1000 MHz	V/m	10	
Resistance to rapid transients	Conforming to IEC 801-4 Level 3	On power supply	kV	2	
		On I/O	kV	1	
Resistance to shock waves	Conforming to IEC 947-1	Waveform 1.2/50 ms ; 0.5 J	U < 50 V	kV	0.5
			U < 150 V	kV	1.5
			U < 300 V	kV	2.5
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm²	0.6...2.5	
	Flexible wire with cable end	1 or 2-wire	mm²	0.34...2.5	
	Rigid cable	1-wire	mm²	0.27...4	
Operating position				Any	
Ambient air temperature around the device	Unrestricted operation		°C	- 5...+ 55	
	Operation at Us		°C	- 25...+ 70	
	Storage		°C	- 40...+ 80	
Operating altitude			m	≤ 300	
Installation category	Conforming to IEC 947-1			II	
Degree of pollution	Conforming to IEC 947-1			2	
Mounting				Standard DIN rails	

Control circuit characteristics (55°C ambient temperature)									
Type of interface			ABS 2EC01EA	ABS 2EC01EB	ABS 2EC01EE	ABS 2EA01EF	ABS 2EA02EF	ABS 2EA01EM	ABS 2EA02EM
Rated voltage Us	≡	V	5	24	48	—	—	—	—
	~	V	—	—	—	115/127 50 Hz	120/127 60 Hz	230/240 50 Hz	230/240 60 Hz
Maximum voltage	≡	V	Negative logic 6 (TTL)	28.8	57.6	—	—	—	—
	~	V	—	—	—	140	140	264	264
Maximum current at Us	≡	mA	13.6	12	10.5	—	—	—	—
	~	mA	—	—	—	14	17	12.5	15
State 1	≡	V	3.75	16.9	36	—	—	—	—
		mA	4.5	7.7	7.5	—	—	—	—
	~	V	—	—	—	86.3	90	173	173
		mA	—	—	—	8.4	9.7	7.9	9.3
State 0	≡	V	2	5.6	10.8	—	—	—	—
		mA	0.09	2	2	—	—	—	—
	~	V	—	—	—	25.4	25.4	48	48
		mA	—	—	—	2.5	2.5	2.5	2.5
State 1 display			Yes	Yes	Yes	Yes	Yes	Yes	Yes
Internal protection reversed polarity			Yes	Yes	Yes	—	—	—	—
Output circuit characteristics									
Rated operating voltage Ue		≡	V	5...48					
Min/max voltage		≡	V	2/60					
Min/max current switched			mA	1/50					
Maximum residual current at state 0			mA	0.1					
Maximum volt drop at state 1			V	1					
Internal protection				Reversed polarity					
External protection				Against short-circuits for Ik ≤ 100 A (≡) Quick-blow fuse, ref. : HA21 0.25 A or equivalent					
Other characteristics									
Type of interface			ABS 2EC01EA	ABS 2EC01EB	ABS 2EC01EE	ABS 2EA01EF	ABS 2EA02EF	ABS 2EA01EM	ABS 2EA02EM
Time delay characteristics		0 → 1	ms	0.05	0.05	0.05	10	10	10
Response time max Ue ≤ 30 V Ie ≥ 5 mA		1 → 0	ms	0.4	0.4	0.4	20	20	20
Maximum switching rate Duty cycle 50 % Ue ≤ 30 V Ie ≥ 5 mA			Hz	1000	1000	1000	25	25	25
Rated insulation voltage				Conforming to IEC 947-1 : 300 V					
				Conforming to VDE 0110 : 250 V group C					
Insulation test voltage		I/O	kVrms	4					
for 1 minute		Wired interface/ground	kVrms	2.5					

Control circuit characteristics (55°C ambient temperature)										
Type of interface			ABS2SC01EB		ABS2SC02EB		ABS2SA01MB		ABS2SA02MB	
Rated voltage U_s		$\overline{\over$								

(1) See temperature derating curves.

Solid-state input modules

Width		Input circuit		Output circuit		Sold in lots of	Catalog number	Weight
		Current	Nominal voltage	Current	Nominal voltage			
mm			V		V			kg
9.5	—	—	5	—	5...48	5	ABS2EC01EA	0.029
			24	—	5...48	5	ABS2EC01EB	0.029
			48	—	5...48	5	ABS2EC01EE	0.029
	~	~	115...127 (50 Hz)	—	5...48	5	ABS2EA01EF	0.032
			120...127 (60 Hz)	—	5...48	5	ABS2EA02EF	0.032
			230...240 (50 Hz)	—	5...48	5	ABS2EA01EM	0.033
			230...240 (60 Hz)	—	5...48	5	ABS2EA02EM	0.033

Solid-state output modules


Width		Input circuit		Output circuit		Sold in lots of	Catalog number	Weight
		Current	Nominal voltage	Current	Nominal voltage			
mm			V	A	V			kg
9.5	—	—	24	— 2	24...48	5	ABS2SC01EB	0.034
				~ 2.3	24...230	5	ABS2SA01MB	0.034
17.5	—	—	24	— 3	24...48	1	ABS2SC02EB	0.043
				~ 3	24...230	1	ABS2SA02MB	0.044

Accessories


For connecting commons, use **ABFC08●●●** flexible combs (Please consult your Regional Sales Offices).

Temperature derating curve for solid-state output modules $U_c = U_s = \text{—} 24 \text{ V}$


ABS2SC01EB d.c.




ABS2SC02EB d.c.




ABS2SA01MB a.c.




ABS2SA02MB a.c.



- 1 Vertical module alone or adjacent to modules with low heat dissipation.



- 2 Horizontal module alone or adjacent to modules with low heat dissipation.




- 3 Vertical module mounted with 2 modules with identical heat dissipation on both sides.


- 4 Horizontal module mounted with 2 modules with identical heat dissipation on both sides.

Dimensions (mm):

ABS2E/ABS 2S●01●●

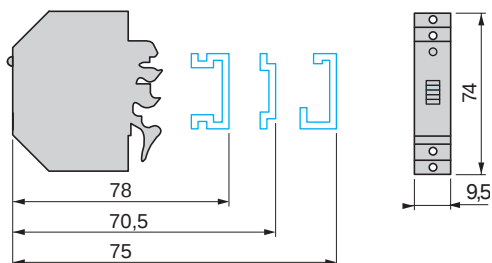


ABS2S●02●●

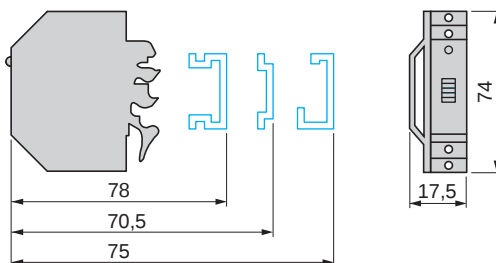


Circuit diagrams

Solid-state input modules


ABS2EC●●●●



ABS2EA●●●●




ABS2E●●●●

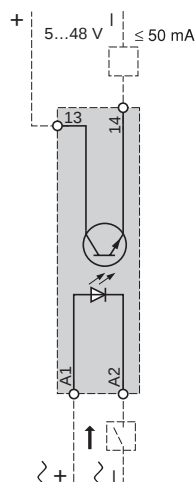


Solid-state output modules


ABS2SC0●EB




ABS2SA0●MB





ABS2SC0●EB

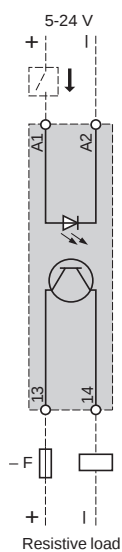

ABS2SA0●MB

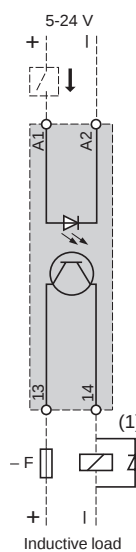

ABS2SA0●MB

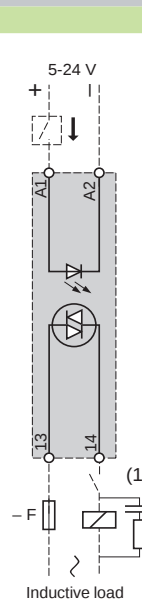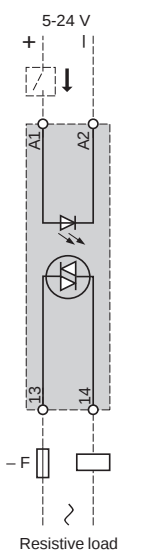

F: fuse DF1 SS133.2

(1) or peak limiter

Applications	Panel mounted
	
Contact type	1 N/O SPST contact
Control voltage ranges	90...280 V 3...32 V, 3.5...32 V
Operating voltages	24...280 V, 48...530 V, 48...660 V 0...100 V
Type of switching	Zero voltage switching DC switching
Current	10, 25, 50, 75, 90, 125 A 12, 25, 40
Degree of protection	IP20
LED indication	Yes
Cooling	Thermal protection or with heat sink accessory
Solid state relay type	SSRP
Page	76

DIN rail mounted



1 N/O SPST contact

90...280 V

90...140 V

4...32 V

3...32 V

24...280 V

Zero voltage switching

10, 20, 30 A

45 A

IP20

Yes

Built-in heat sink

SSRD

76

Introduction

The **SSR** solid state relay range includes:

- relays for panel mounting: **SSRP**.
- relays for DIN rail mounting: **SSRD**.

Description

SSRP relays for panel mounting

- 1 2 x Ø 4.9 holes for mounting.
- 2 Connection terminals.
- 3 Connection terminal screws.
- 4 Input voltage indicator LED, green.
- 5 Thermal interface which must be via the back of the product.



SSRD relays for DIN rail mounting

- 1 Lugs for plate mounting.
- 2 Built-in heat sink.
- 3 Connection terminals.
- 4 Connection terminal screws.
- 5 Input voltage indicator LED, green.
- 6 Bracket for mounting on 35 mm DIN rail.



General characteristics

SSRP solid state relays, panel mounting

Product certifications			UR E258297, CSA LR 40787, IEC 60950-1, IEC 62314
Product marking			CE
Ambient air temperature around the device	Storage	°C	- 40...+ 80
	Operation	°C	- 40...+ 125
Encapsulation			Thermally conductive epoxy
Degree of protection			IP20 (with cover), IP00 (without cover)
Terminal screw torque		Nm	Inputs: 1.1 (screw: Ø 3.5 / length 6 mm) Outputs: 2.2 (screw: Ø 4 / length 7.4 mm)

SSRD solid state relay, DIN rail mounting

Product certifications			UR E258297, CSA LR 40787, IEC 60950-1, IEC 62314
Product marking			CE
Ambient air temperature around the device	Storage	°C	- 40...+ 80
	Operation	°C	- 40...+ 125
Encapsulation			Thermally conductive epoxy
Degree of protection			IP20
Terminal screw torque	10...30 A relays	Nm	Inputs: 0.6...0.7 / Outputs: 0.6...0.7
	45 A relays	Nm	Inputs: 0.6...0.7 / Outputs: 1.1...1.7
Max. wire size	10...30 A relays		Inputs: 5.3 mm² - AWG 10 / Outputs: 5.3 mm² - AWG 10
	45 A relays		Inputs: 3.3 mm² - AWG 12 / Outputs: 8.4 mm² - AWG 8

SSRP solid state relays, panel mounting				
Relay type	SCR output, Zero voltage switching	SSRPCDS10A1	SSRPCDS25A1	SSRPCDS50A1
Input specification				
Control voltage range	$\sim$ V	3...32	3...32	3...32
Maximum turn-on voltage	$\sim$ V	3	3	3
Maximum turn-off voltage	$\sim$ V	1.0	1.0	1.0
Maximum typical input current	mA	10 at $\sim$ 12 V	10 at $\sim$ 12 V	10 at $\sim$ 12 V
Output specification				
Operating voltage	$\sim$ V	24...280	24...280	24...280
Load current range	A	0.15...10	0.15...25	0.15...50
Transient overvoltage	Vpk	600	600	600
Maximum surge current (16.6 ms)	Apk	120	250	625
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6
Thermal resistance junction to base plate	°C/W	1.48	1.02	0.63
Maximum I²t for fusing (8.3 ms)	A²sec	60	260	1620
Maximum off-state leakage current at rated voltage	mA	1.0	1.0	1.0
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	Cycle	1/2	1/2	1/2
Maximum turn-off time	Cycle	1/2	1/2	1/2
Relay type	SCR output, Zero voltage switching	SSRPCDS75A2	SSRPCDS90A3	SSRPCDS125A3
Input specification				
Control voltage range	$\sim$ V	3...32	3...32	3...32
Maximum turn-on voltage	$\sim$ V	3	3	3
Maximum turn-off voltage	$\sim$ V	1.0	1.0	1.0
Typical input current	mA	10 at $\sim$ 12 V	10 at $\sim$ 12 V	10 at $\sim$ 12 V
Output specification				
Operating voltage	$\sim$ V	48...530	48...660	48...660
Load current range	A	0.15...75	0.25...90	0.25...125
Transient overvoltage	Vpk	1200	1200	1200
Maximum surge current (16.6 ms)	Apk	1110	1350	2000
Maximum On-state voltage drop at rated current	Vrms	1.6	1.7	1.7
Thermal resistance junction to base plate	°C/W	0.31	0.28	0.22
Maximum I²t for fusing (8.3 ms)	A²sec	4150	6000	12 700
Maximum off-state leakage current at rated voltage	mA	1.0	1.0	1.0
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	Cycle	1/2	1/2	1/2
Maximum turn-off time	Cycle	1/2	1/2	1/2
Relay type	SCR output, Zero voltage switching	SSRPP8S10A1	SSRPP8S25A1	SSRPP8S50A1
Input specification				
Operating voltage	$\sim$ V	90...280	90...280	90...280
Maximum turn-on voltage	Vrms	90	90	90
Maximum turn-off voltage	Vrms	10	10	10
Typical input current	mA	6 at 120 Vrms	6 at 120 Vrms	6 at 120 Vrms
Output specification				
Operating voltage	$\sim$ V	24...280	24...280	24...280
Load current range	A	0.15...10	0.15...25	0.15...50
Transient overvoltage	Vpk	600	600	600
Maximum surge current (16.6 ms)	Apk	400	600	850
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6
Thermal resistance junction to base plate	°C/W	1.48	1.02	0.63
Maximum I²t for fusing (8.3 ms)	A²sec	60	260	1620
Maximum off-state leakage current at rated voltage	mA	10 max.	10 max.	10 max.
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	ms	10 max.	10 max.	10 max.
Maximum turn-off time	ms	40 max.	40 max.	40 max.
Relay type	Mosfet output	SSRPCDM12D5	SSRPCDM25D5	SSRPCDM40D5
Input specification				
Control voltage range (input voltage)	$\sim$ V	3.5...32	3.5...32	3.5...32
Maximum turn-on voltage	$\sim$ V	3.5	3.5	3.5
Maximum turn-off voltage	$\sim$ V	1.0	1.0	1.0
Typical input current	mA	1.6 ($\sim$ 5 V), 28 ($\sim$ 32 V)	1.6 ($\sim$ 5 V), 28 ($\sim$ 32 V)	1.6 ($\sim$ 5 V), 28 ($\sim$ 32 V)
Output specification				
Control voltage range	$\sim$ V	0...100	0...100	0...100
Load current range	A	12	25	40
Minimum load current	mA	0	0	0
Maximum surge current (16.6 ms)	Apk	28	51	106
Maximum On-state voltage drop at rated current	Vpk	1.6	2.1	2.1
Thermal resistance junction to base plate	°C/W	1.34	0.83	0.83
Maximum off-state leakage current at rated voltage	mA	0.2	0.3	0.3
On-state resistance	Ω	0.13	0.05	0.05
Maximum turn-on time	μsec	100	100	100
Maximum turn-off time	msec	1.0	1.0	1.0

SSRP solid state relays, panel mounting (continued)						
Relay type	SCR output, Zero voltage switching		SSRPP8S75A2	SSRPP8S90A3	SSRPP8S125A3	
Input specification						
Operating voltage	~ V		90...280	90...280	90...280	
Maximum turn-on voltage	Vrms		90	90	90	
Maximum turn-off voltage	Vrms		10	10	10	
Typical input current	mA		6 at 120 Vrms	6 at 120 Vrms	6 at 120 Vrms	
Output specification						
Operating voltage	~ V		48...530	48...660	48...660	
Load current range	A		0.15...75	0.25...90	0.25...125	
Transient overvoltage	Vpk		1200	1200	1200	
Maximum surge current (16.6 ms)	Apk		1110	1350	2000	
Maximum On-state voltage drop at rated current	Vrms		1.6	1.7	1.7	
Thermal resistance junction to base plate	°C/W		0.31	0.28	0.22	
Maximum I²t for fusing (8.3 ms)	A²sec		4150	6000	12 700	
Maximum off-state leakage current at rated voltage	mA		10 max.	5 max.	5 max.	
Minimum off-sate dv/dt at maximum rated voltage	V/µsec		500	500	500	
Maximum turn-on time	ms		10 max.	10 max.	10 max.	
Maximum turn-off time	ms		40 max.	40 max.	40 max.	
SSRD solid state relay, DIN rail mounting						
Relay type	SCR output, Zero voltage switching		SSRDP8S10A1	SSRDP8S20A1	SSRDP8S30A1	SSRDF8S45A1
Input specification						
Operating voltage	~ V		90...280	90...280	90...280	90...140
Maximum turn-on voltage	Vrms		90	90	90	90
Maximum turn-off voltage	Vrms		10	10	10	10
Typical input current	mA		2 (120 Vrms), 4 (240 Vrms)	2 (120 Vrms), 4 (240 Vrms)	2 (120 Vrms), 4 (240 Vrms)	15 (120 Vrms)
Output specification						
Operating voltage	~ V		24...280	24...280	24...280	24...280
Load current range	A		10	20	30	45
Transient overvoltage	Vpk		600	600	600	600
Maximum surge current (16.6 ms)	Apk		120	250	625	625
Maximum On-state voltage drop at rated current	Vrms		1.6	1.6	1.6	1.6
Maximum I²t for fusing (8.3 ms)	A²sec		60	260	1620	1620
Maximum off-state leakage current at rated voltage	mA		10	10	10	10
Minimum off-sate dv/dt at maximum rated voltage	V/µsec		500	500	500	500
Maximum turn-on time	ms		10 max.	10 max.	10 max.	10 max.
Maximum turn-off time	ms		40 max.	40 max.	40 max.	40 max.
Relay type	SCR output, Zero voltage switching		SSRDCDS10A1	SSRDCDS20A1	SSRDCDS30A1	SSRDCDS45A1
Input specification						
Control voltage range	~ V		4...32	4...32	4...32	3...32
Maximum turn-on voltage	~ V		4.0	4.0	4.0	4.0
Maximum turn-off voltage	~ V		1.0	1.0	1.0	1.0
Typical input current	mA		8...12	8...12	8...12	17
Output specification						
Operating voltage	~ V		24...280	24...280	24...280	24...280
Load current range	A		10	20	30	45
Transient overvoltage	Vpk		600	600	600	600
Maximum surge current (16.6 ms)	Apk		120	250	625	625
Maximum On-state voltage drop at rated current	Vrms		1.6	1.6	1.6	1.6
Maximum I²t for fusing (8.3 ms)	A²sec		60	260	1620	1620
Maximum off-state leakage current at rated voltage	mA		10	10	10	10
Minimum off-sate dv/dt at maximum rated voltage	V/µsec		500	500	500	500
Maximum turn-on time	Cycle		1/2	1/2	1/2	1/2
Maximum turn-off time	Cycle		1/2	1/2	1/2	1/2




SSR PCDS25A1



SSR DCDS10A1



SSR DCDS45A1

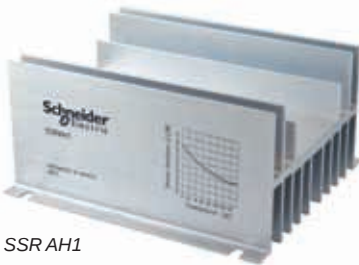

SSR AH1



SSR AT1

Solid state relays, 1 N/O SPST contact

■ Panel mounting

Switching	Voltage range		Load current range	Catalog numbers	Weight
	Input	Output			
	V	V	A		kg
SCR output					
Zero voltage switching	~ 3...32	~ 24...280	10	SSRPCDS10A1	0.113
			25	SSRPCDS25A1	0.113
			50	SSRPCDS50A1	0.113
			~ 48...530	SSRPCDS75A2	0.113
			~ 48...660	SSRPCDS90A3	0.113
	~ 90...280	~ 24...280	125	SSRPCDS125A3	0.113
			10	SSRPP8S10A1	0.113
			25	SSRPP8S25A1	0.113
			50	SSRPP8S10A1	0.113
			~ 48...530	SSRPP8S75A2	0.113
			~ 48...660	SSRPP8S90A3	0.113
			125	SSRPP8S125A3	0.113

Mosfet output

DC switching	~ 3.5...32	~ 0...100	12	SSRPCDM12D5	0.113
			25	SSRPCDM25D5	0.113
			40	SSRPCDM40D5	0.113

■ DIN rail mounting

SCR output

Zero voltage switching	~ 90...280	~ 24...280	10	SSRDP8S10A1	0.272
			20	SSRDP8S20A1	0.272
			30	SSRDP8S30A1	0.272
	~ 90...140	~ 24...280	45	SSRDF8S45A1	0.482
			10	SSRDCDS10A1	0.272
			20	SSRDCDS20A1	0.272
	~ 4...32	~ 24...280	30	SSRDCDS30A1	0.272
			45	SSRDCDS45A1	0.482
			10	SSRDCDS10A1	0.272
			20	SSRDCDS20A1	0.272

Accessories for panel mounted relays

Description	For use with 10...50A relays (1)	Catalog numbers	Weight kg
Heat sink	SSR PP8S●●●●, SSR PCDS●●●●, SSR PCDM●●●●	SSRAH1	0.487
Thermal interface Sold in lots of 10	SSR PP8S●●●●, SSR PCDS●●●●, SSR PCDM●●●●	SSRAT1	0.011


(1) for load current range 75, 90 and 125 A relays, please contact your Customer Care Center.

Solid state relays, 1 N/O SPST contact

■ Panel mounting



Solid state relays SSRP

Thermal interface SSRAT1

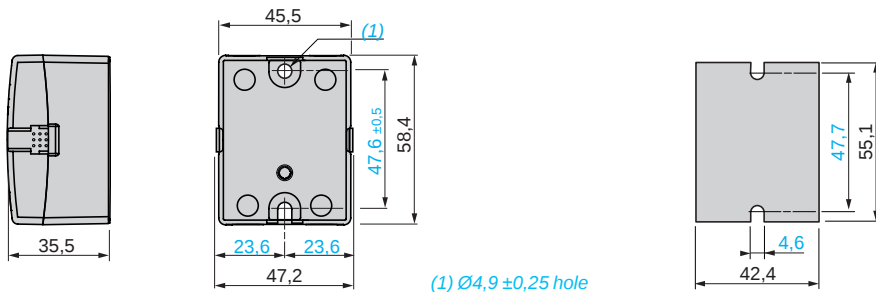

Heat sink SSRAH1


Heat sink dissipation curve

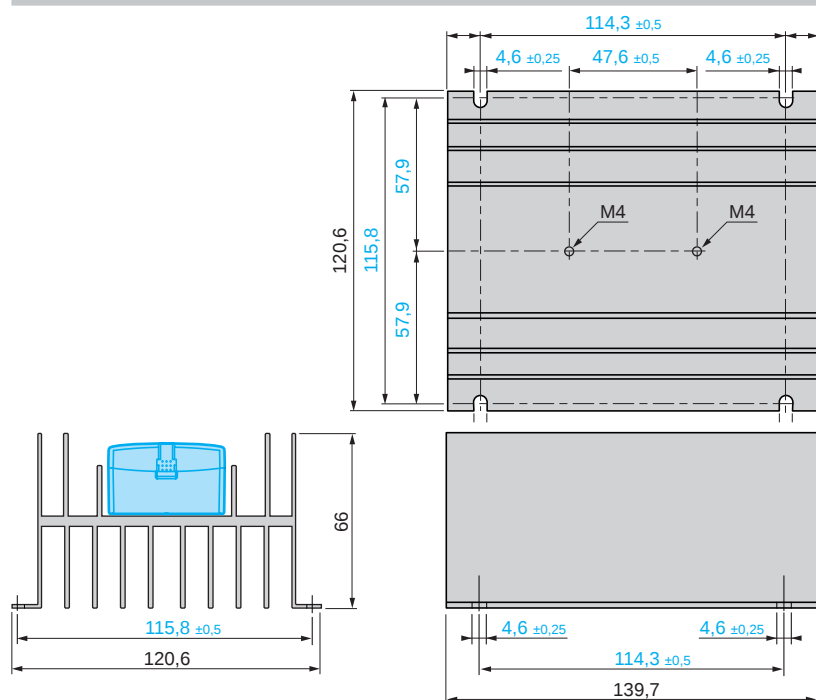

■ DIN rail mounting

10...30 A relays

45 A relays

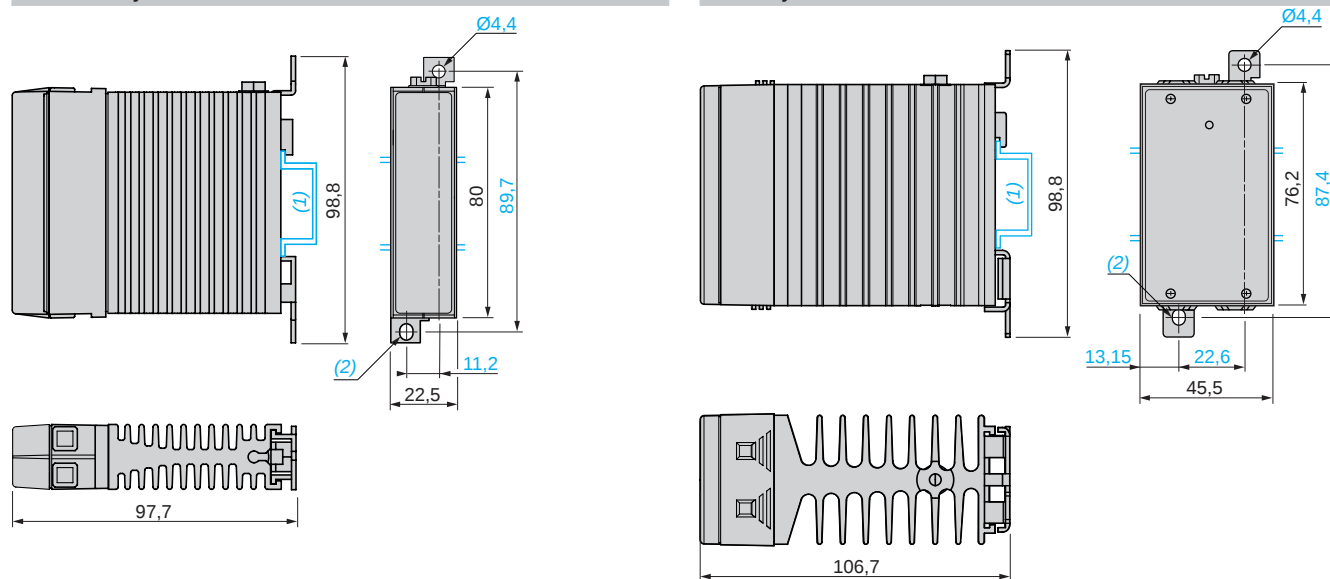

(1) 35 mm DIN rail. (2) Ø4,4 x 5,5 elongated hole


(1) 35 mm DIN rail. (2) Ø4,4 x 5,5 elongated hole

Thermal derating curves

■ Panel mounting SSRP relays


□ SCR output

10 A relays

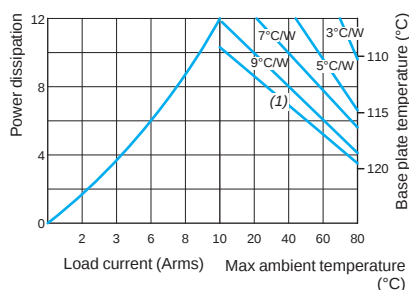


(1) No heat sink

25 A relays

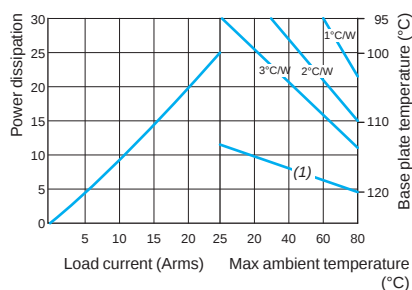


(1) No heat sink

50 A relays

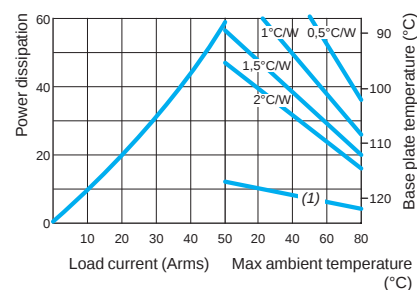


(1) No heat sink

75 A relays

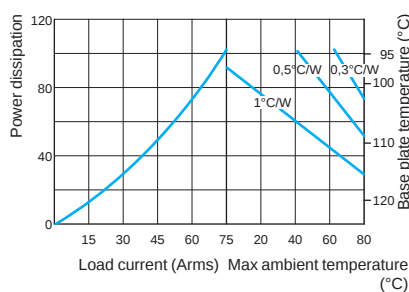


90 A relays

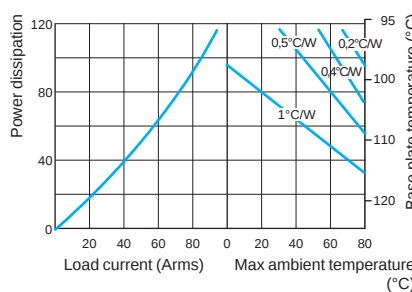


(1) No heat sink

125 A relays

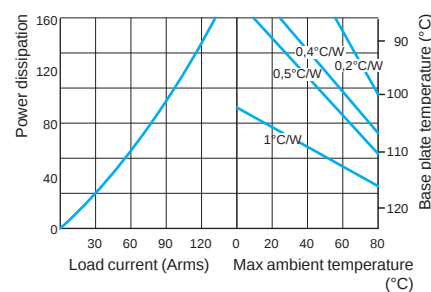


□ Mosfet output

12 A relays

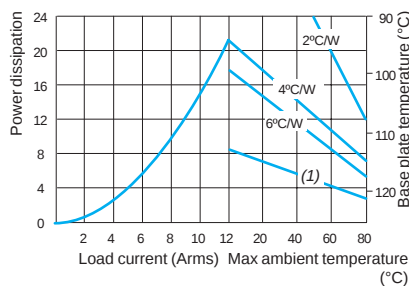

(1) No heat sink


25 and 40 A relays

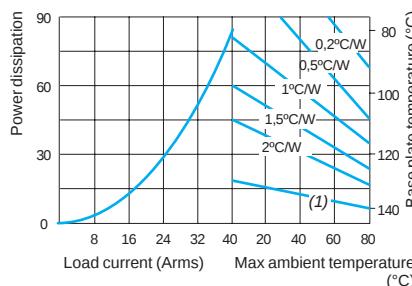

(1) No heat sink

■ Rail mounting SSRD relays

10...45 A relays

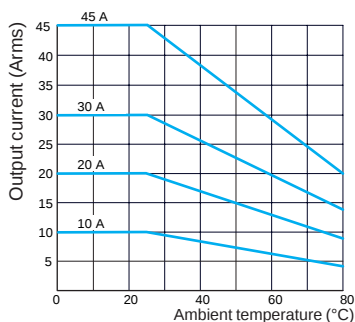

Schneider Electric USA Inc.

<http://www.schneider-electric.us/>

8001 Knightdale Blvd.
Knightdale, NC 27545
Tel: 919-266-3671

19 Waterman Avenue
Toronto, Ontario M4B 1Y2
Tel: 416-752-8020

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Please note: not all parts listed in this catalog are available in all countries.

Design: Schneider Electric
Photos: Schneider Electric



2010 Electromechanical and solid-state Zelio® Relays